


101BHM1



Alloy Steel

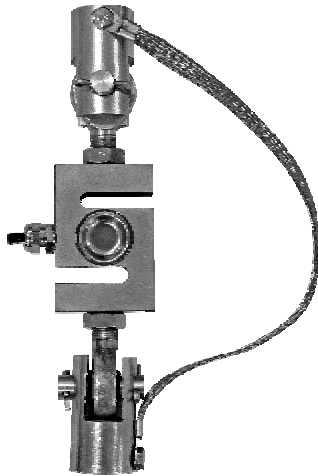


Features:

- Assembles: 101 BH S-beam load cell
- Capacities: 50kg-10t
- Load cell is isolated from stray currents
- Allows for high accuracy tension loading
- Equipped with clevis mounts with nylon insulating washers and Teflon ball joint rod ends

Load Cell Certifications:



Load Cell Not Included.

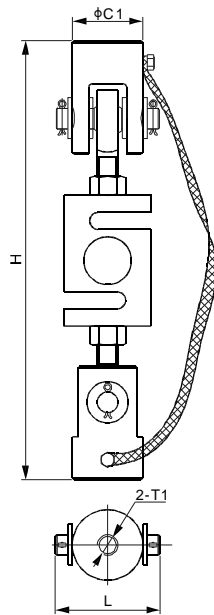

DIMENSIONS

LOAD CELL CAPACITY	H	L	C1	T1
kg/mm				
50 -1,500; SE 2,000	236	51	41	M12 Depth22
2,000-5,000	332	73	61	M20 Depth32
10,000	500	110	93	M30 Depth45
lb/inches (conversion of above dimensions)				
110.23-3,306.93; SE4,409.25	9.29	2.01	1.61	M12 Depth0.87
4,409.25-11,023.11	13.07	2.87	2.40	M20 Depth1.26
22,046.22	19.69	4.33	3.66	M30 Depth1.77

PART NUMBER

Load Cell Capacity	Part No.	Shipping Weight (kg) Approx.
50kg-200kg.....	101BHM1-(50-200)kg.....	1.3
300kg-SE2t.....	101BHM1-(0.3-SE2)t.....	1.3
2t-5t.....	101BHM1-(2-5)t.....	3.2
10t.....	101BHM1-10t.....	-