

Wireless Weighing Indicator, Stainless Steel




Features:

- LCD display with dot characters and backlight
- Stainless steel enclosure material
- Includes battery charger with several protection modes to extend battery life, 60 hours operation time after one charge
- Indicator automatically turns off after 30 minutes without operation
- Standard RS232 communication interface
- Thermal receipt printer
- Can gather up to 2000 weighing data records that can be sorted, searched and printed

General Specifications	
Enclosure Material	Stainless Steel
Units of Measurement	kg, lb
Working Humidity	≤85% RH
Working Temperature	0°C to 40°C / 32°F to 104°F
Dimensions	280mm × 73mm × 200mm
	11.0in × 2.9in × 7.9in
Display Type	LCD
Display Digits	5 digits
Digit Height	25.4mm / 1in
Display Dimensions	98mm × 34mm / 3.9in × 1.3in
Paper Roll Width	57mm / 2.2in
Paper Roll Diameter	φ30mm / φ1.2in (w/reel)
Power Supply	Rechargeable Ni-H battery 7.2V / 2800mA
IP Rating	IP66

Technical Specifications	
Division	1; 2; 5; 10; 20; 50
Tare range	100% Full Scale
Input Signal Range	-3 ~ 15mV
Excitation Voltage	5VDC ± 3%
Display Resolution	10,000
Wireless Communication Frequency	433 or 915Mhz
Wireless Transmission Distance	100m
Clock	Clock with independent button battery

PART NUMBER		
Part No.	Frequency	Shipping Weight (kg) Approx.
S2-01.....	433Mhz.....	2.72
S2-02.....	915Mhz.....	2.72

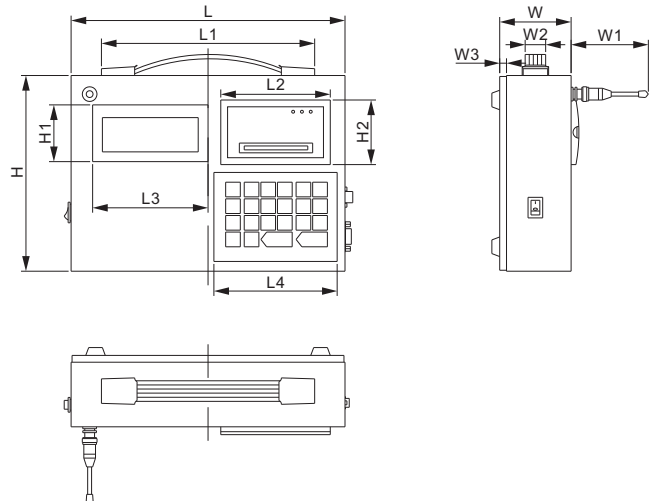

DIMENSIONS

	H	H1	H2	L	L1	L2	L3	L4	W	W1	W2	W3
inches	7.9	2.3	2.6	11.0	8.6	4.4	4.6	5.0	2.9	3.1	0.8	0.3
mm	200	58	66	280	218	112	118	126	73	79	21	7

INDICATORS