
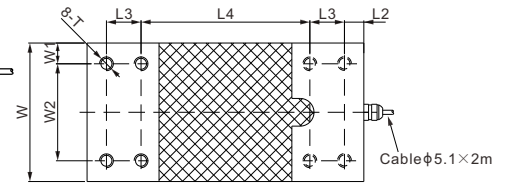


Aluminum

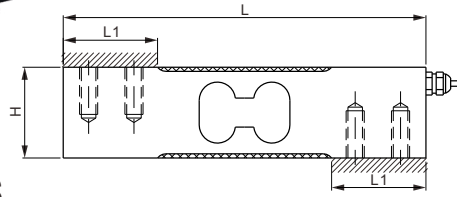

RATED CAPACITY	DIMENSIONS									
	H	L	L1	L2	L3	L4	W	W1	W2	T
108JA:										
kg/mm										
20-100	25.0	150.0	32.5	6.0	19.0	100.0	45.0	7.5	30.0	M8 Depth15
LE60-LE100; SE150-SE400	40.0	150.0	32.5	6.0	19.0	100.0	45.0	7.5	30.0	M8 Depth20
150-400; SE600	40.0	150.0	38.5	6.0	25.0	88.0	75.0	12.5	50.0	M8 Depth20
500-2,000	50.0	200.0	52.0	14.0	25.0	122.0	100.0	15.0	70.0	M10 Depth23
lb/inches (conversion of above dimensions)										
44.1-220.5	0.98	5.91	1.28	0.24	0.75	3.94	1.77	0.30	1.18	M8 Depth0.59
LE132.3-LE220.5; SE330.7-SE881.8	1.57	5.91	1.28	0.24	0.75	3.94	1.77	0.30	1.18	M8 Depth0.79
330.7-881.8; SE1,322.8	1.57	5.91	1.52	0.24	0.98	3.46	2.95	0.49	1.97	M8 Depth0.79
1,102.3-4,409.2	1.97	7.87	2.05	0.55	0.98	4.80	3.94	0.59	2.76	M10 Depth0.91
108JA-21:										
kg/mm										
30-250	38.0	150.0	44.0	6.3	25.4	86.6	38.0	-	25.4	M6 Depth 15
lb/inches (conversion of above dimensions)										
66.14-551.16	1.50	5.91	1.73	0.25	1.00	3.41	1.50	-	1.00	M6 Depth 0.59

SPECIFICATIONS			
Full Scale Output	2.0 mV/V ± 10%	Reference Max. Platform Size 108JA: Capacity: 20-100kg: 460×600 mm Capacity: 150-400kg: 600×600 mm Capacity: 500kg-2t: 900×900 mm 108JA-21: 500×500 mm	
Zero Balance	± 0.02 mV/V		
Non-linearity	< ± 0.017%		
Repeatability	< ± 0.017%		
Hysteresis Error	< ± 0.017%	Nominal Temperature Range	-10°C to 40°C / 14°F to 104°F
Creep in 30 min.	< ± 0.017%	Seal Type / IP Rating	Environmentally Sealed / IP66
Input Resistance	415 Ω ± 15	Cable Color Code 108JA: Exc+ Red Exc- Black Sig+ Green Sig- White Shield Bare 108JA-21: Exc+ Green Exc- Black Sig+ Red Sig- White Shield Bare	
Output Resistance	350 Ω ± 3		
Element Material	Aluminum, Clear Anodized		
Recommended Excitation	10V (15V Maximum)		
Safe Overload	150% of full scale		
Breaking Overload	300% of full scale		
Insulation Resistance	>2[50V DC] GΩ		

PART NUMBER*		
Rated Capacity	Part No.	Weight Approx. (kg)
20kg	108JA-20kg	0.4
50kg	108JA-50kg	0.5
60kg	108JA-60kg	0.5
LE60kg	108JA-LE60kg	0.7
75kg	108JA-75kg	0.5
LE75kg	108JA-LE75kg	0.7
100kg	108JA-100kg	0.5
LE100kg	108JA-LE100kg	0.7
SE150kg	108JA-SE150kg	0.7
150kg	108JA-150kg	1.1
SE200kg	108JA-SE200kg	0.7
200kg	108JA-200kg	1.1
SE300kg	108JA-SE300kg	0.7
300kg	108JA-300kg	1.1
SE400kg	108JA-SE400kg	0.7
400kg	108JA-400kg	1.1
500kg	108JA-500kg	2.5
SE600kg	108JA-SE600kg	1.1
750kg	108JA-750kg	2.5
1t	108JA-1t	2.5
1.5t	108JA-1.5t	2.5
2t	108JA-2t	2.6

* ATEX, FM, IECEx approved versions carry the "-Ex" suffix.

PART NUMBER		
Rated Capacity	Part No.	Weight (kg) Approx.
30kg	108JA-30kg-21	0.6
50kg	108JA-50kg-21	0.6
75kg	108JA-75kg-21	0.6
100kg	108JA-100kg-21	0.6
150kg	108JA-150kg-21	0.6
250kg	108JA-250kg-21	0.6

INTERCHANGEABLE REFERENCE	
Brand	Model
108JA-21	
Anyload	108LAMT
Vishay-Tedea Huntleigh	1242
Vishay-Tedea Huntleigh	1241(metric thread)
Mettler Toledo	MT1241

20kg-500kg: NTEP 1:5 000 Class III, Single Cell;
 SE600kg-2t: NTEP 1:4 000 Class III, Single Cell
 20kg-30kg: OIML-CS C7.5, Y=20 000;
 50kg-500kg: OIML-CS C6, Y=29 000;
 SE600kg-2t: OIML-CS C4, Y=4 000
 For further available P/N's & specifications per NTEP/OIML classes, please contact us.

Product Datasheet Disclaimer

Information Changes:

All product specifications, statements, information, and data (collectively, the “Information”) in this catalog or made available elsewhere by ANYLOAD are subject to change. Customers must verify the applicability of the Information at the time of order placement.

Accuracy and Reliability:

While all Information is believed to be accurate and reliable, it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Laboratory Conditions:

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all metrological conditions. Users must validate that a product with the described properties is suitable for their applications.

Interchangeability:

Statements of interchangeability with other manufacturers are based on ANYLOAD’s knowledge at the time of publication and are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another Manufacturer.

Warranty Voidance:

Any use of the product outside of specifications or any storage or installation inconsistent with product guidance voids any warranty.

Intended Use:

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. ANYLOAD provides technical advice without obligation or liability for the advice given or results obtained.

Component Failures:

Although ANYLOAD designs and manufactures its products to stringent quality and safety standards, isolated component failures may still occur. Applications requiring high reliability or safety should employ suitable designs or safeguards to ensure that component failure does not result in personal injury or property damage.

High-Risk Applications:

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services, or deliverables for use in high-risk applications (e.g., medical life support, nuclear facilities, weapon systems). ANYLOAD makes no assurances that the products are suitable for high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process.

Contact authorized ANYLOAD personnel for special terms and conditions regarding products designed for specific safety requirements.

Safety Measures:

All product-related warnings, cautions, and notes must be observed. Customers should not assume that all safety measures are indicated or that other measures may not be required.

California Proposition 65:

⚠ WARNING: Some products manufactured or distributed by ANYLOAD may contain trace amounts of chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm. These substances are present in minimal quantities and are typically encapsulated within our products. This warning is provided to enable you to make informed decisions as a consumer.