
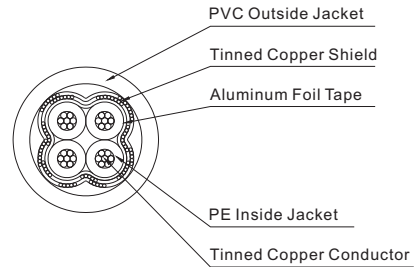


Load Cell Cable

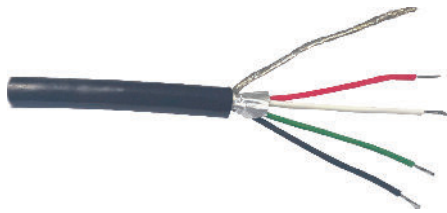


SPECIFICATIONS	
Temperature	-30°C to 85°C / -22°F to 185°F
Wire Resistance	≤ 0.09Ω/m
Screen	1
Capacity	≤ 80PF/m
Length	100m (loose) / 300m (with reel)

PART NUMBER	Wire	Outside Diameter	Cross Section Area	AWG	Length	With Reel	Self Weight (approx)	
							KG	LB
CB4-5.1-100m	4 wire	5.1mm±0.2	0.212mm ² /wire	24	100m (328ft)	no	3.2	7.0
CB4-5.1-500ft					152m (500ft)	yes	5.6	12.3
CB4-5.1-300m					300m (984ft)	yes	10.3	22.7
CB4-7.6-100m	4 wire	7.6mm±0.3	0.314mm ² /wire	22	100m (328ft)	no	7.9	17.4
CB4-7.6-500ft					152m (500ft)	yes	12.7	27.9
CB4-7.6-300m					300m (984ft)	yes	23.7	52.1

CB4RP

Load Cell Cable

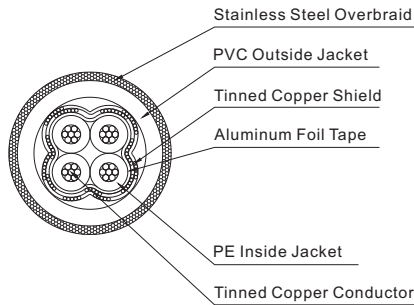

SPECIFICATIONS	
Temperature	-30°C to 85°C / -22°F to 185°F
Wire Resistance	≤ 0.09Ω/m
Screen	1
Capacity	≤ 80PF/m
Length	100m (loose) / 300m (with reel)

PART NUMBER	Wire	Outside Diameter	Cross Section Area	AWG	Length	With Reel	Self Weight (approx)	
							KG	LB
CB4RP-8-100m	4 wire	8.0mm±0.3	0.314mm ² /wire	22	100m (328ft)	yes	11.9	26.2

CABLE, CONNECTOR & ACCESSORIES