


102EHM2


Alloy Steel

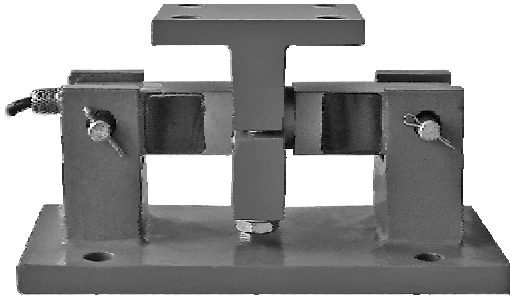


Features:

- Assembles: 102EH double ended beam load cell
- Capacities: 1Klb-75Klb
- Self-checking with anti-lifting protection

Load Cell Certifications:



Load Cell Not Included.

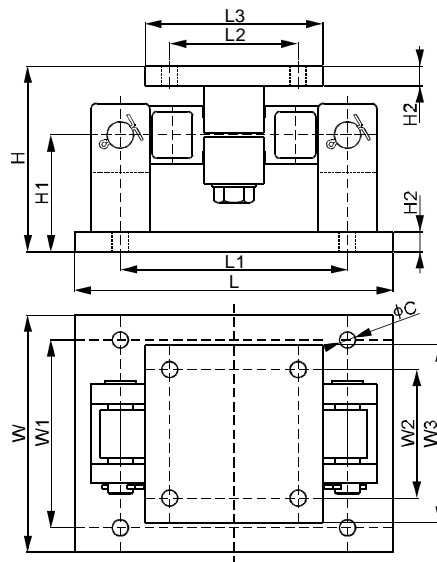

DIMENSIONS

LOAD CELL CAPACITY	C	H	H1	H2	L	L1	L2	L3	W	W1	W2	W3
lb/inches												
1,000-5,000	0.56	5.08	2.95	0.50	9.25	6.25	2.75	4.00	5.00	3.75	2.75	4.00
10,000-25,000	0.81	7.94	4.84	0.75	12.00	7.50	6.00	8.00	8.00	6.00	6.00	8.00
35,000	0.81	8.02	4.84	0.75	12.00	7.50	6.00	8.00	8.00	6.00	6.00	8.00
50,000-75,000	0.81	9.38	5.90	1.00	16.12	11.50	6.50	9.00	12.00	9.50	6.50	9.00
kg/mm (conversion of above dimensions)												
453.6-2,268	14.2	129.0	74.9	12.7	235.0	158.8	69.9	101.6	127.0	95.3	69.9	101.6
4,535.9-11,339.8	20.6	201.6	123.0	19.0	304.8	190.5	152.4	203.2	203.2	152.4	152.4	203.2
15,875.7	20.6	203.8	123.0	19.0	304.8	190.5	152.4	203.2	203.2	152.4	152.4	203.2
22,679.6-34,019.4	20.6	238.2	149.9	25.4	409.4	292.0	165.1	228.6	304.8	241.3	165.1	228.6

PART NUMBER

Load Cell Capacity	Part No.	Shipping Weight (kg) Approx.
1Klb-5Klb	102EHM2-(1-5)Klb	7.7
10Klb-25Klb	102EHM2-(10-25)Klb	30.0
35Klb	102EHM2-35Klb	30.0
50Klb	102EHM2-50Klb	70.0
75Klb	102EHM2-75Klb	-

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake	RL1600
Vishay Sensortronics	65016-TWA

WEIGH MODULES