

Aluminum




Features:

- Aluminum enclosure material
- Power Supply: 90-240VAC, 50/60Hz
- Units of Measurement: kg, t
- IP Rating: IP40
- Parameter and calibration settings are performed on the front panel
- Improper operation and fault indicator
- Two-way relay output
- Two-way external input switch interface
- CE certified with regards to the Electromagnetic Compatibility Directive
- CE certified with regards to the Low Voltage Directive
- Functions: Auto zero scale, Auto Zero tracking, PEAK, Zero Scale, TARE, GROSS/NET, 2-way analog output

INDICATORS

SPECIFICATIONS			
Division	1; 2; 5; 10; 20; 50	Working Humidity	≤90% RH
Tare range	100% Full Scale	Working Temperature	-10°C to 50°C / 14°F to 122°F
Max. number of load cells	8 × 350Ω or 16 × 800Ω	Dimensions	112mm × 55mm × 169.5mm 4.4in × 2.17in × 6.67in
Max. power consumption	10VA	Display Type	LED
Excitation Voltage	5V Dc ± 3%	Display Digits	6 digits
Fusible-link fuse (slow blow)	1.25A	Digit Height	14mm / 0.55in
Enclosure Material	Stainless Steel SS304	Power Supply	90-240VAC, 50/60Hz
Units of Measurement	kg, t	IP Rating	IP40

PART NUMBER		
Descriptions	Part No.	Shipping Weight (kg) Approx.
806DA + RS232 + 4-20mA.....	806DA-2A.....	0.75
806DA + RS232 + 0-10V.....	806DA-2V.....	0.75
806DA + 4-20mA.....	806DA-A.....	0.75
806DA + 0-10V.....	806DA-V.....	0.75

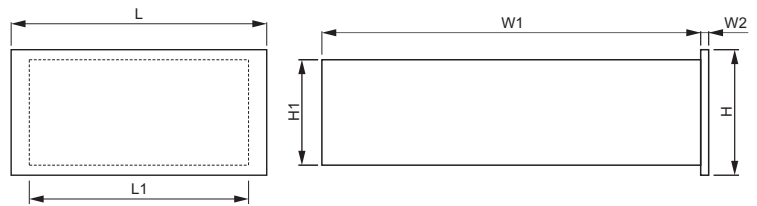

	H	H1	L	L1	W1	W2
inches	2.2	1.8	4.4	3.8	6.5	0.1
mm	55	46.2	112	96.1	166	3.5