

Aluminum




Features:

- Aluminum enclosure material
- Power Supply: 90-240VAC, 50/60Hz
- Units of Measurement: kg, t
- IP Rating: IP40
- Parameter and calibration settings are performed on the front panel
- Improper operation and fault indicator
- Two-way relay output
- Two-way external input switch interface
- CE certified with regards to the Electromagnetic Compatibility Directive
- CE certified with regards to the Low Voltage Directive
- Functions: Auto zero scale, Auto Zero tracking, PEAK, Zero Scale, TARE, GROSS/NET, 2-way analog output

INDICATORS

| SPECIFICATIONS | | | |
|-------------------------------|-----------------------|---------------------|---|
| Division | 1; 2; 5; 10; 20; 50 | Working Humidity | ≤90% RH |
| Tare range | 100% Full Scale | Working Temperature | -10°C to 50°C / 14°F to 122°F |
| Max. number of load cells | 8 × 350Ω or 16 × 800Ω | Dimensions | 112mm × 55mm × 169.5mm 4.4in × 2.17in × 6.67in |
| Max. power consumption | 10W | Display Type | LED |
| Excitation Voltage | 5V DC ± 3% | Display Digits | 6 digits |
| Fusible-link fuse (slow blow) | 1.25A | Digit Height | 14mm / 0.55in |
| Enclosure Material | Aluminum | Power Supply | 90-240VAC, 50/60Hz |
| Units of Measurement | kg, t | IP Rating | IP40 |

| PART NUMBER | | |
|-----------------------------|---------------|------------------------------|
| Descriptions | Part No. | Shipping Weight (kg) Approx. |
| 806DA + RS232 + 4-20mA..... | 806DA-2A..... | 0.75 |
| 806DA + RS232 + 0-10V..... | 806DA-2V..... | 0.75 |
| 806DA + 4-20mA..... | 806DA-A..... | 0.75 |
| 806DA + 0-10V..... | 806DA-V..... | 0.75 |

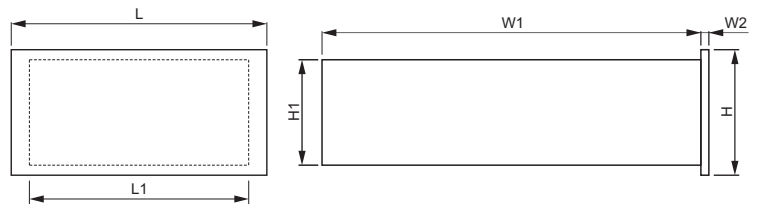

| | H | H1 | L | L1 | W1 | W2 |
|--------|-----|------|-----|------|-----|-----|
| inches | 2.2 | 1.8 | 4.4 | 3.8 | 6.5 | 0.1 |
| mm | 55 | 46.2 | 112 | 96.1 | 166 | 3.5 |