


OCSD Series

OCSD Scoreboard BD

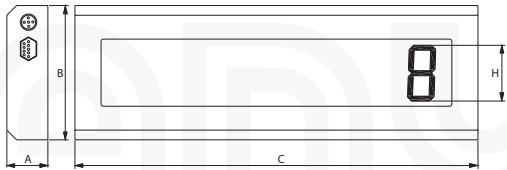


FEATURES

- **Communication Interface:** Wireless 2.4GHz
- **Power Supply:** 110VAC, 60Hz
- **High-lighted digital segment and broad eyesight with special optical filter film**
- **Effective Distance:** Up to 50m for non obstructive path
- **Display character:** 6-bit LED with character height 75mm (BD3 steel housing)
- **Display character:** 6-bit LED with character height 125mm (BD5 steel housing)
- **Two pre-drilled holes on the back panel for hanging**
- **Temperature:** -10~40°C
- **Humidity:** ≤85%RH

Model	A (mm)	B (mm)	C (mm)	H (mm)
BD3	55	180	540	75
BD5	58	260	780	125

OCSD Hook OCSD-HOOK-WLL

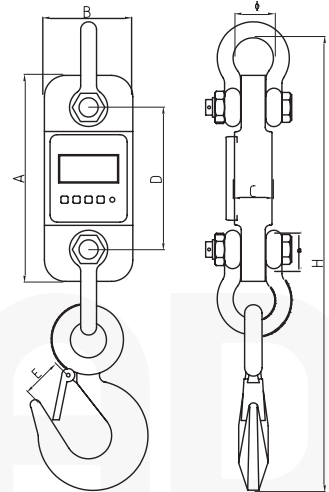

FEATURES

- **High quality 40Cr alloy steel**
- **Breaking load:** up to 400% rated capacity

OCSD Capacity	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
1t	245	112	37	190	45
2t	245	116	37	190	45
3t	260	123	37	195	55
5t	285	123	57	210	65
10t	320	120	57	230	95

OCSD Capacity	∅(mm)	H (mm)	Hook Rated Capacity
1t	43	485	4.5t
2t	43	485	4.5t
3t	51	555	7t
5t	58	635	11t
10t	92	840	22t