


## OCSL Series



### FEATURES

- Fast resolution switching
- 20mm 5 digits LCD display
- Fixed hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb / N
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function

<b>Model</b>	<b>OCSL</b>
<b>Type</b>	Mini
<b>Accuracy Class</b>	OIML III
<b>Enclosure</b>	Die-casting Aluminum
<b>Display</b>	20mm LCD with Backlight
<b>Capacity Available</b>	60 / 120 / 250 / 400 / 600 lb
<b>Battery Life</b>	100 Hours
<b>Shackle</b>	Stainless Steel
<b>Hook</b>	Stainless Steel
<b>Battery</b>	3 x AA
<b>Infrared Remote Control</b>	No

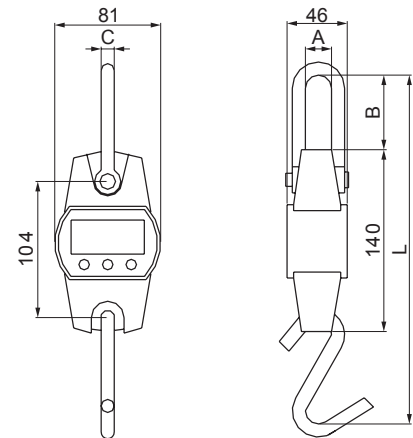

Rated Capacity	Division	A	B	C	L	N.W.	G.W.
30kg / 60 lb	0.01kg / 0.02 lb	20mm / 0.79"	70mm / 2.76"	10mm / 0.39"	265mm / 10.43"	540g / 1.2 lb	0.8kg / 1.76 lb
60kg / 120 lb	0.02kg / 0.05 lb	20mm / 0.79"	70mm / 2.76"	10mm / 0.39"	265mm / 10.43"	540g / 1.2 lb	0.8kg / 1.76 lb
120kg / 250 lb	0.05kg / 0.1 lb	20mm / 0.79"	70mm / 2.76"	10mm / 0.39"	265mm / 10.43"	540g / 1.2 lb	0.8kg / 1.76 lb
200kg / 400 lb	0.1kg / 0.2 lb	20mm / 0.79"	70mm / 2.76"	10mm / 0.39"	265mm / 10.43"	540g / 1.2 lb	0.8kg / 1.76 lb
300kg / 600 lb	0.1kg / 0.2 lb	20mm / 0.79"	70mm / 2.76"	10mm / 0.39"	265mm / 10.43"	540g / 1.2 lb	0.8kg / 1.76 lb

\*Dimensions and specifications are subject to change without notice.