


## OCSS Series

### FEATURES

- Fast resolution switching
- 22mm/11MM 5 digits LCD display
- Fixed hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function

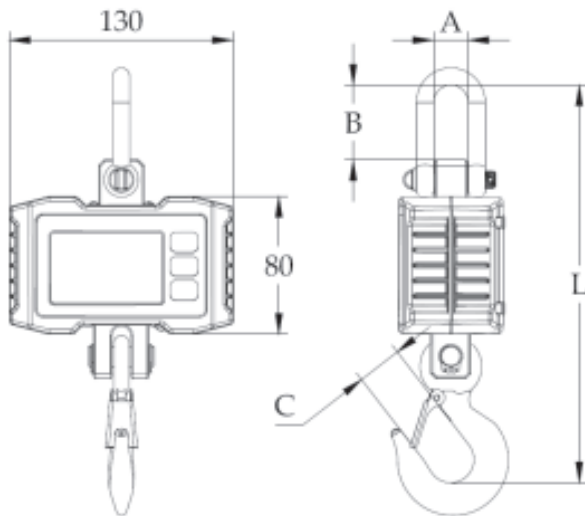

<b>Model</b>	<b>OCSS</b>
<b>Type</b>	Smart
<b>Accuracy Class</b>	OIML III
<b>Enclosure</b>	Die-casting Aluminum
<b>Display</b>	22mm / 11mm LCD w/ Backlight
<b>Capacity Available</b>	200 / 400 / 600 / 1000 / 2000 lb
<b>Battery Life</b>	100 Hours
<b>High Quality Load Receptor</b>	Alloy Steel / Aluminum
<b>Shackle</b>	Stainless Steel
<b>Hook</b>	American Standard Eye
<b>High Capacity Rechargeable Battery</b>	3 x AA
<b>Infrared Remote Control</b>	No

Rated Capacity	Division	A	B	C	L	N.W.
100kg / 200 lb	0.05kg / 0.1 lb	20mm / 0.79"	43mm / 1.69"	25mm / 0.98"	220mm / 8.66"	1.0kg / 2.2 lb
200kg / 400 lb	0.1kg / 0.2 lb	20mm / 0.79"	43mm / 1.69"	25mm / 0.98"	220mm / 8.66"	1.0kg / 2.2 lb
300kg / 600 lb	0.1kg / 0.2 lb	20mm / 0.79"	43mm / 1.69"	25mm / 0.98"	220mm / 8.66"	1.0kg / 2.2 lb
500kg / 1Klb	0.2kg / 0.5 lb	20mm / 0.79"	43mm / 1.69"	25mm / 0.98"	220mm / 8.66"	1.0kg / 2.2 lb
1t / 2Klb	0.5kg / 1 lb	20mm / 0.79"	43mm / 1.69"	27mm / 1.06"	230mm / 9.06"	1.4kg / 3.1 lb

\*Dimensions and specifications are subject to change without notice.