


### Features:

- Watertight amplifier
- Can drive up to 2 x350Ω load cells
- Can be connected directly to 1 or 2 load cells or connected to several load cells through a junction box

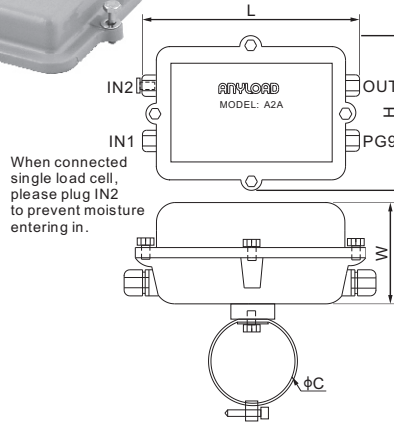


### DIMENSIONS

	C	H	L	W
mm	40-80	113	170	63
inches	1.6-3.1	4.4	6.7	2.5

### SPECIFICATIONS

Load Cell Type		All strain gage type
Weight (G), approx.	kg/lb	0.6 / 1.3
Power Supply	V DC	24 ± 20%
Input Range	mV	0 - 30
Max. Power Voltage	DC	30V, 2.5A
Output Signal	V	0 - 10
	mA	4 - 20 (Adjustable ± 20%)
Max. Input Offset Voltage	μV	50
Min. Common-mode Rejection Ratio (G=10)	dB	100
Installation		Single Point Fixing / Clamp fixing
Protection Class		IP66
Enclosure Material		Aluminum casting

### CONNECTION DIAGRAM

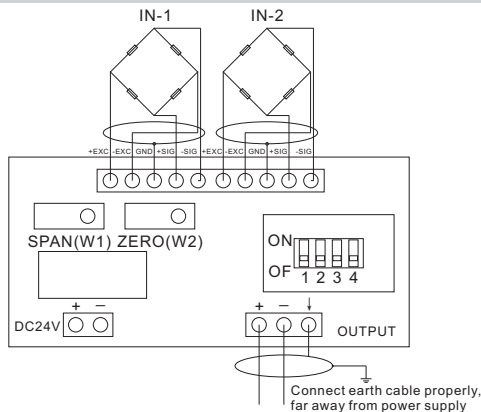

### PART NUMBER

Part No.	Shipping Weight (kg) Approx.
A2A.....	0.6