


FSP Series

FEATURES

- Ultra heavy duty steel construction
- Extra thickness -- 6mm thick deck plate with checkered safety tread
- Extra thickness -- 6mm thick rigid steel channel frame construction
- Symmetrical grid channel frame
- Painted mild steel
- Pre-corner error adjustment
- Threaded eyebolt holes for easy lifting (eyebolts included)
- Installed with:
 - * 4 high accuracy IP67 alloy steel shear beam load cells (563YH) (OIML MAA C6, Y=8,500 and NTEP 1:5000 Class III, Multiple Cell)
 - * 4 swivel mild steel feet with removable rubber base (AMF - ¾)
 - * 1 IP67 aluminum 4-way junction box (J04EA)
 - * 2 eyebolts
 - * Level bubble
- Measurement Canada approved

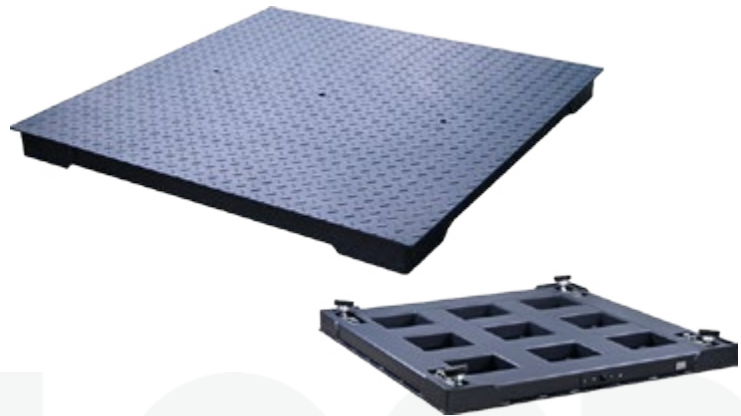

*NTEP Approval for
 - FSP4'X4'-5Klb-HD
 - FSP4'X4'-10Klb-HD

*Measurement Canada Approval for
 - FSP4'X4'-5Klb-HD
 - FSP4'X4'-10Klb-HD

Part#	FSP4X4-5Klb-HD	FSP4X4-10Klb-HD
Capacity	5000 lb	10000 lb
Division	1 lb	2 lb
Platform Size	48 in X 48 in / 121.9 cm X 121.9 cm	48 in X 48 in / 121.9 cm X 121.9 cm
Platform Material	Mild Steel	Mild Steel
Net Weight	265 lb / 120kg	265 lb / 120kg
Operating Temp.	0 - 40°C / 32 - 104 °F	0 - 40°C / 32 - 104 °F

*Dimensions and specifications are subject to change without notice.