




**Features:**

- One input port, can connect directly to 1 x load cell (350Ω), or max 4 load cells (350Ω each) through a junction box, or max 8 load cells (700Ω each) through a junction box
- One output port, signal can be either 0...10 V or 4...20 mA

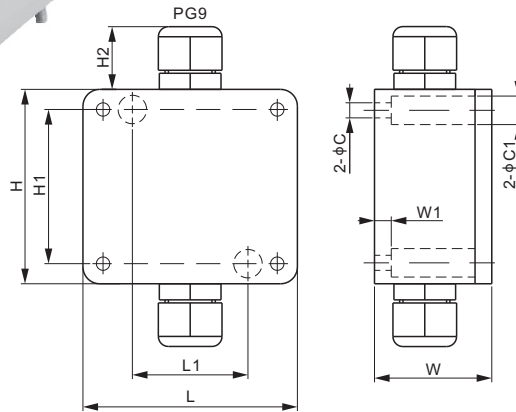


**DIMENSIONS**

	C	C1	H	H1	H2	L	L1	W	W1
mm	4.5	8.5	58	46	18	64	34.5	35	5
inches	0.2	0.3	2.3	1.8	0.7	2.5	1.4	1.4	0.2

**SPECIFICATIONS**

Load Cell Type		All strain gage type
Weight (G), approx.	kg/lb	0.17 / 0.37
Power Supply	V DC	24 ± 10%
Input Range	mV	0 - 30
Max. Power Voltage	DC	30V, 2.5A
Output Signal (Zero adjustable ± 20%)	V	0 - 10
	mA	4 - 20
Max. Output Current	mA	40
Max. Input Offset Voltage	µV	50
Min. Common-mode Rejection Ratio (G=10)	dB	100
Protection Class		IP66
Enclosure Material		Aluminum casting

**CONNECTION DIAGRAM**

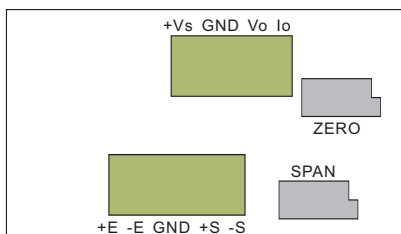

**PART NUMBER**

Part No.	Shipping Weight (kg) Approx.
A1A-22.....	0.17

\* Not compatible with these models of IO-Link of Balluff's:  
 - BNI IOL-709-000-K006  
 - BNI IOL-710-000-K006  
 - BNI IOL-712-000-K023  
 - BNI IOL-714-000-K023