

## OCSM Series


### FEATURES

- Fast resolution switching
- 30mm 5 digits LED display
- Rotatable hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb (lb unit annunciator will turn on if lb is selected and will turn off if set to kg)
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function



### OPTION

- Wireless Scoreboard
- LCD display version, model OCSM2

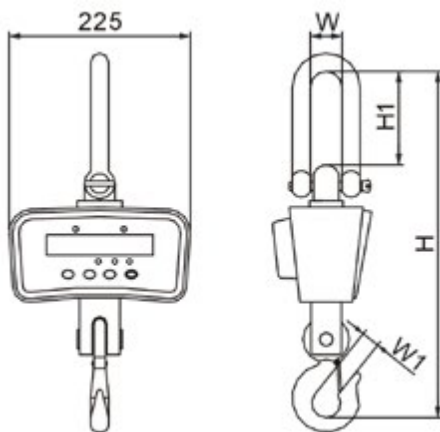

|                                           |                                  |
|-------------------------------------------|----------------------------------|
| <b>Model</b>                              | <b>OCSM1</b>                     |
| <b>Type</b>                               | Light                            |
| <b>Accuracy Class</b>                     | OIML III                         |
| <b>Enclosure</b>                          | Die-casting aluminum             |
| <b>Display</b>                            | 30mm LED                         |
| <b>Capacity Available</b>                 | 200 / 400 / 600 / 1000 / 2000 lb |
| <b>Battery Life</b>                       | 80 Hours                         |
| <b>High Quality Load Receptor</b>         | Alloy Steel                      |
| <b>Shackle</b>                            | Stainless Steel                  |
| <b>Hook</b>                               | Rotatable                        |
| <b>High Capacity Rechargeable Battery</b> | Yes 6V/5Ah                       |
| <b>Infrared Remote Control</b>            | Yes                              |

| Rated Capacity | Division | H              | H1           | W            | W1           | N.W.           | G.W.            |
|----------------|----------|----------------|--------------|--------------|--------------|----------------|-----------------|
| 200lb          | 0.1 lb   | 350mm / 13.78" | 80mm / 3.15" | 20mm / 0.79" | 24mm / 0.94" | 4.1kg / 9.0 lb | 5.2kg / 11.5 lb |
| 400lb          | 0.2 lb   | 350mm / 13.78" | 80mm / 3.15" | 20mm / 0.79" | 24mm / 0.94" | 4.1kg / 9.0 lb | 5.2kg / 11.5 lb |
| 600lb          | 0.2 lb   | 350mm / 13.78" | 80mm / 3.15" | 20mm / 0.79" | 24mm / 0.94" | 4.1kg / 9.0 lb | 5.2kg / 11.5 lb |
| 1Klb           | 0.5 lb   | 370mm / 14.57" | 85mm / 3.35" | 25mm / 0.98" | 36mm / 1.42" | 4.3kg / 9.5 lb | 5.6kg / 12.3 lb |
| 2Klb           | 1 lb     | 370mm / 14.57" | 85mm / 3.35" | 25mm / 0.98" | 36mm / 1.42" | 4.3kg / 9.5 lb | 5.6kg / 12.3 lb |

\*Dimensions and specifications are subject to change without notice.