


Features:

- Enclosure Material: Stainless steel SS304
- Number of cells: 2 - 4 single cells
- Trimming: Individual cell with excitation or signal trim
- Equipped with independent adjustable resistors
- Captive stainless steel screws
- IP Rating: IP65

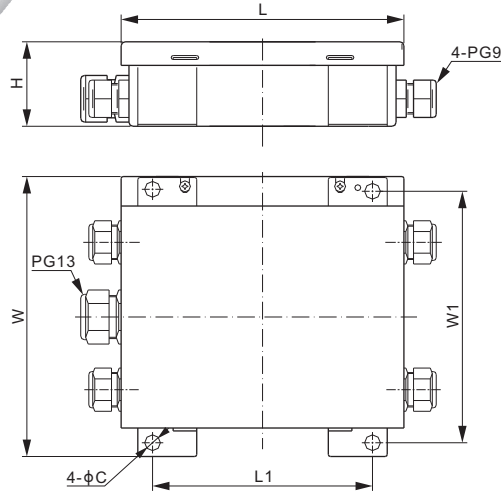

DIMENSIONS

| | C | H | L | L1 | W | W1 |
|--------|-----|-----|-----|-----|-----|-----|
| mm | 8 | 44 | 144 | 112 | 142 | 128 |
| inches | 0.3 | 1.7 | 5.7 | 4.4 | 5.6 | 5.0 |

SPECIFICATIONS

| | | | |
|------------------------------|---------------------------------|---------------------------|--|
| Number of Cells | 2 - 4 single cells | Trimming | Individual cell with excitation or signal trim |
| Input Cable Fittings | PG9: 4mm - 8mm diameter cable | Enclosure Material | Stainless steel SS304 |
| Output Cable Fittings | PG13: 6mm - 12mm diameter cable | IP Rating | IP65 |

TRIMMING RANGE

| Load Cell Resistance | Signal Trim | Excitation Trim |
|----------------------|-------------|-----------------|
|----------------------|-------------|-----------------|

| | | |
|--------|---------------------|---------------------|
| 350 Ω |3.6% of output |2.3% of output |
| 700 Ω |6.3% of output |1.3% of output |
| 1000 Ω |7.0% of output |1.0% of output |

PART NUMBER

| Trimming | Lightning Protection | Part No. | Weight (kg) Approx. |
|------------|----------------------|---------------|---------------------|
| Excitation |No |J04ES |0.7 |
| Signal |No |J04SS |0.7 |
| Excitation |Yes |J04ES-II |0.7 |
| Signal |Yes |J04SS-II |0.7 |

MOTHERBOARD LAYOUT

