



## OCSC Series


### FEATURES

- Fast resolution switching
- Supplied with 2 rechargeable batteries
- LED display 5 digits 1.5inch (38mm)
- Rotatable hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function

### OPTION

- LCD display version, model OCSC4

<b>Model</b>	<b>OCSC3</b>
<b>Type</b>	Convenience
<b>Accuracy Class</b>	OIML III
<b>Enclosure</b>	Die-casting aluminum
<b>Capacity Available</b>	2/4/6/10Klb
<b>Battery Life</b>	80Hours (with 2 batteries)
<b>High Quality Load Receptor</b>	Alloy Steel
<b>Shackle</b>	H.D. Fixed
<b>Hook</b>	H.D. Rotatable
<b>High Capacity Rechargeable Battery</b>	Yes (Easy to exchange) 6V/3.2Ahx2
<b>Infrared Remote Control</b>	Yes

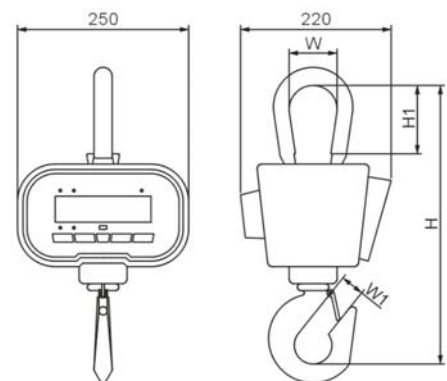

Rated Capacity	Division	H	H1	W	W1	N.W.	G.W.
2Klb/1t	1lb/0.5kg	420mm/16.5"	100mm/3.9"	70mm/2.8"	35mm/1.4"	11.5kg/25lb	14kg/31lb
4Klb/2t	2lb/1kg	420mm/16.5"	100mm/3.9"	70mm/2.8"	35mm/1.4"	11.5kg/25lb	14kg/31lb
6Klb/3t	2lb/1kg	420mm/16.5"	100mm/3.9"	70mm/2.8"	35mm/1.4"	11.5kg/25lb	14kg/31lb
10Klb/5t	5lb/2kg	480mm/18.9"	115mm/4.5"	85mm/3.3"	40mm/1.6"	15kg/33lb	18kg/40lb

\*Dimensions and specifications are subject to change without notice.