




OCSC Series

FEATURES

- Fast resolution switching
- Supplied with 2 rechargeable batteries
- 38mm 5 digits LED display for OCSC3
- 30mm 5 digits LCD display for OCSC4
- Rotatable hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function

| Model | OCSC3 | OCSC4 |
|------------------------------------|--------------------------------------|--------------------------------------|
| Type | Convenience | Convenience |
| Accuracy Class | OIML III | OIML III |
| Enclosure | Die-casting Aluminum | Die-casting Aluminum |
| Display | 38mm LED | 30mm LCD w/Backlight |
| Capacity Available | 2 / 4 / 6 / 10 Klb | 2 / 4 / 6 / 10 Klb |
| Battery Life | 80 Hours (with 2 batteries) | 80 Hours (with 2 batteries) |
| High Quality Load Receptor | Alloy Steel | Alloy Steel |
| Shackle | H.D. Fixed | H.D. Fixed |
| Hook | H.D. Rotatable | H.D. Rotatable |
| High Capacity Rechargeable Battery | Yes (Easy to exchange) 6V/3.2Ahx2 | Yes (Easy to exchange) 6V/3.2Ahx2 |
| Infrared Remote Control | Yes | Yes |

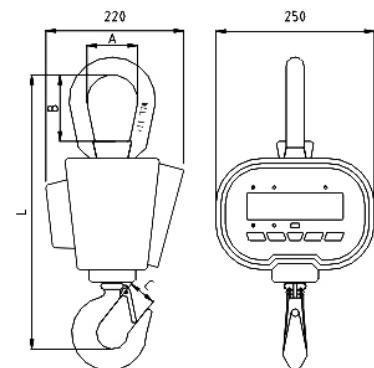

| Rated Capacity | Division | A | B | C | L | N.W. | G.W. |
|----------------|----------|--------------|---------------|--------------|----------------|------------------|----------------|
| 2Klb | 1 lb | 70mm / 2.76" | 100mm / 3.94" | 35mm / 1.38" | 420mm / 16.54" | 11.5kg / 24.4 lb | 14kg / 31.0 lb |
| 4Klb | 2 lb | 70mm / 2.76" | 100mm / 3.94" | 35mm / 1.38" | 420mm / 16.54" | 11.5kg / 24.4 lb | 14kg / 31.0 lb |
| 6Klb | 2 lb | 70mm / 2.76" | 100mm / 3.94" | 35mm / 1.38" | 420mm / 16.54" | 11.5kg / 24.4 lb | 14kg / 31.0 lb |
| 10Klb | 5 lb | 85mm / 3.35" | 115mm / 4.53" | 40mm / 1.57" | 480mm / 18.90" | 15kg / 33.1 lb | 18kg / 39.7 lb |

*Dimensions and specifications are subject to change without notice.