


Stainless Steel



Keyboard Configuration

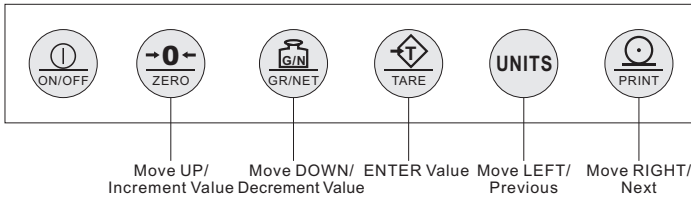

Features:


- NTEP III/IIIL, 10 000 approved
- Measurement Canada III, 10 000; III HD 20 000
- Material: Stainless steel
- IP Rating: IP66
- LCD 6-digit display
- Power Supply: External AC adaptor or rechargeable lithium batteries 7.4V/4000mA
- Parameter and calibration settings are performed on the front panel
- Units of Measurement: kg, lb, g, oz, lb:oz conversion
- Improper operation and fault indication
- Two way relay signal output
- Programmable print format
- Built-in clock
- Functions: Auto zero scale, Auto zero tracking, PEAK, COUNTING, ZERO SCALE, TARE, GROSS/NET, Print interface

General Specifications	
Enclosure Material	Stainless Steel
Units of Measurement	kg, lb, g, oz, lb:oz conversion
Working Humidity	≤90% RH
Working Temperature	-10°C to 40°C / 14°F to 104°F
Dimensions	226mm × 76mm × 181mm
	8.9in × 3.0in × 7.13in
Display Type	LCD
Display Digits	6 digits
Digit Height	25.4mm / 1in
Display Dimensions	143mm × 41mm / 5.6in × 1.6in
Power Supply	AC adaptor or rechargeable lithium batteries
	7.4V/4000mA
IP Rating	IP66

Technical Specifications	
Division	1; 2; 5; 10
Tare range	100% Full Scale
Max. Number of load cells	8 × 350Ω; 16 × 700Ω
Max. power consumption	10W
Excitation Voltage	5V DC ± 5%
Resettable fuse	1.1A
Communicate interface	RS-232
Print interface	Serial interface
Input Range	Up to 20mV
Update Rate	20ms or 50Hz

PART NUMBER

Part No.	Enclosure	Interface	Weight Approx. (kg)
805BS-B-19Stainless steel 304RS-232 & RS-4852.3
805BS-TN-BStainless steel 201RS-232 only2.3

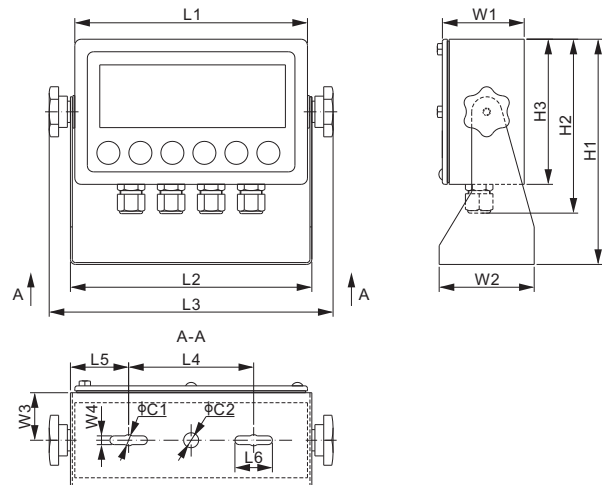

DIMENSIONS

	C1	C2	H1	H2	H3	L1	L2	L3	L4	L5	L6	W1	W2	W3	W4
inches	0.4	0.5	7.1	5.5	4.6	7.3	7.6	8.9	3.9	1.8	1.2	2.6	3.0	1.5	0.3
mm	9	12	181	139	116	186	193	226	100	46.5	30	65	76	38	7

All product specifications, statements, information and data (collectively, the "Information") in this catalog or made available elsewhere by ANYLOAD are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all conditions. It is the customer's responsibility to validate that a particular product with the properties described in the product specifications is suitable for use in their applications. Statements of interchangeability with other manufacturers are based on ANYLOAD's knowledge of product information at the time a publication was made, but are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another manufacturer.

Any use of product outside of specifications or any storage or installation inconsistent with product guidance voids and warranty.

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by ANYLOAD with reference to the use of ANYLOAD's products produces no obligation or liability for the advice given or results obtained.

Although ANYLOAD designs and manufactures its products to the most stringent quality and safety standards, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services or deliverables for use in high risk applications including medical life support, medical device, direct physical patient contact, water treatment, nuclear facilities, weapon systems, mass and air transportation control, flammable environments, or any other potentially life critical uses. Customer understands and agrees that ANYLOAD makes no assurances that the products, services or deliverables are suitable for any high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process. Although all product - related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required. Please contact authorized ANYLOAD personnel to obtain special terms and conditions regarding products designed for such applications or otherwise satisfy specific safety requirements.