



108MA; 108MAUN

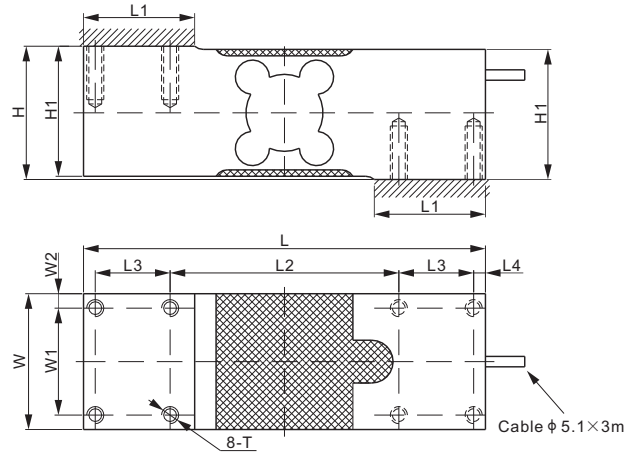

Aluminum

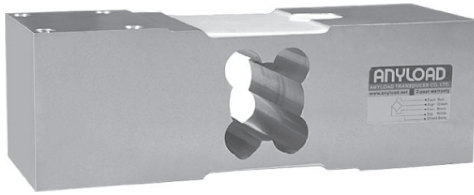

DIMENSIONS

RATED CAPACITY	H	H1	L	L1	L2	L3	L4	W	W1	W2	T
108MAUN, 108MAUN-A1:											
kg/mm											
50-660	62.3	60.8	188.0	52.0	107.0	35.0	5.5	63.5	50.0	6.8	5/16-18 UNC-2B Depth20
lb/inches (conversion of above dimensions)											
110.23-1455.05	2.45	2.39	7.40	2.05	4.21	1.38	0.22	2.50	1.97	0.27	5/16-18 UNC-2B Depth0.8
108MA, 108MA-A1:											
kg/mm											
50-660	62.3	60.8	188.0	52.0	107.0	35.0	5.5	63.5	50.0	6.8	M8 Depth20
lb/inches (conversion of above dimensions)											
110.23-1,455.05	2.45	2.39	7.40	2.05	4.21	1.38	0.22	2.50	1.97	0.27	M8 Depth0.8

SPECIFICATIONS

Maximum Capacity (E _{max})	kg	50 / 75 / 100 / 150 / 200 / 250 / 300 / 500 / 635 / 660
Model		108MA/108MAUN 108MA-A1/108MAUN-A1
Accuracy class according to NTEP Class III S		1:3000 1:4000
Maximum number or verification interval (n _{max})		3000 4000
Y		12300
Temperature effect on zero balance	%*Cn/K	±0.00114
Temperature effect on sensitivity	%*Cn/K	±0.0012 ±0.000875
Non-linearity	%*Cn	±0.017 ±0.010
Hysteresis Error	%*Cn	±0.017 ±0.012
Creep error (30min)/DR	%*Cn	±0.017 ±0.012
Full Scale Output (C _n)	mV/V	2 ± 10%
Zero Balance	mV/V	±0.02
Recommended voltage	V	10 (15 Maximum)
Input Resistance	Ω	415 ± 15
Output Resistance	Ω	350 ± 3
Insulation resistance [50V DC]	GΩ	>2
Safe overload [Elim]	%*E _{max}	150
Breaking overload	%*E _{max}	300
Safe side load	%*E _{max}	100
Nominal temperature range	°C / °F	-10 to 40 / 14 to 104
Element Material		Aluminum, Clear Anodized
Seal type / IP rating		Environmentally Sealed / IP66
Cable color code		Exc+ Red Exc- Black Sig+ Green Sig- White

SINGLE POINTS

PART NUMBER*

Metric thread, 1:3000 accuracy

Rated Capacity	Part No.	Weight (kg) Approx.
50kg	108MA-50kg	1.9
75kg	108MA-75kg	1.9
100kg	108MA-100kg	1.9
150kg	108MA-150kg	1.9
200kg	108MA-200kg	1.9
250kg	108MA-250kg	1.9
300kg	108MA-300kg	1.9
500kg	108MA-500kg	1.9
635kg	108MA-635kg	1.9
660kg	108MA-660kg	1.9

Metric thread, 1:4000 accuracy

Rated Capacity	Part No.	Weight (kg) Approx.
50kg	108MA-50kg-A1	1.9
75kg	108MA-75kg-A1	1.9
100kg	108MA-100kg-A1	1.9
150kg	108MA-150kg-A1	1.9
200kg	108MA-200kg-A1	1.9
250kg	108MA-250kg-A1	1.9
300kg	108MA-300kg-A1	1.9
500kg	108MA-500kg-A1	1.9
635kg	108MA-635kg-A1	1.9
660kg	108MA-660kg-A1	1.9

* ATEX, FM, IECEx approved versions carry the "-Ex" suffix.

INTERCHANGEABLE REFERENCE

Manufacturer	Model
108MA, 108MA-A1	
Mettler-Toledo	MT1260
108MAUN, 108MAUN-A1	
Coti Global	CG-50-1
HBM	PW16
Rice Lake	RL1260
Vishay Tedeo-Huntleigh	1260

PART NUMBER*

Imperial thread, 1:3000 accuracy

Rated Capacity	Part No.	Weight (kg) Approx.
50kg	108MAUN-50kg	1.9
75kg	108MAUN-75kg	1.9
100kg	108MAUN-100kg	1.9
150kg	108MAUN-150kg	1.9
200kg	108MAUN-200kg	1.9
250kg	108MAUN-250kg	1.9
300kg	108MAUN-300kg	1.9
500kg	108MAUN-500kg	1.9
635kg	108MAUN-635kg	1.9
660kg	108MAUN-660kg	1.9

Imperial thread, 1:4000 accuracy

Rated Capacity	Part No.	Weight (kg) Approx.
50kg	108MAUN-50kg-A1	1.9
75kg	108MAUN-75kg-A1	1.9
100kg	108MAUN-100kg-A1	1.9
150kg	108MAUN-150kg-A1	1.9
200kg	108MAUN-200kg-A1	1.9
250kg	108MAUN-250kg-A1	1.9
300kg	108MAUN-300kg-A1	1.9
500kg	108MAUN-500kg-A1	1.9
635kg	108MAUN-635kg-A1	1.9
660kg	108MAUN-660kg-A1	1.9

AVAILABLE OPTION

■ stainless steel version of 108MAUN: 651KS55UN



50kg-500kg: NTEP 1:5 000 Class III, Single Cell;
635kg-660kg: NTEP 1:4 000 Class III, Single Cell



50kg-500kg: OIML MAA C6, Y=29 000;
635kg-660kg: OIML MAA C4, Y=4 000

For further definition of P/N's & specifications per NTEP/OIML classes, please contact us.

All product specifications, statements, information and data (collectively, the "Information") in this catalog or made available elsewhere by ANYLOAD are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all conditions. It is the customer's responsibility to validate that a particular product with the properties described in the product specifications is suitable for use in their applications. Statements of interchangeability with other manufacturers are based on ANYLOAD's knowledge of product information at the time a publication was made, but are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another manufacturer.

Any use of product outside of specifications or any storage or installation inconsistent with product guidance voids and warranty.

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by ANYLOAD with reference to the use of ANYLOAD's products produces no obligation or liability for the advice given or results obtained.

Although ANYLOAD designs and manufactures its products to the most stringent quality and safety standards, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services or deliverables for use in high risk applications including medical life support, medical device, direct physical patient contact, water treatment, nuclear facilities, weapon systems, mass and air transportation control, flammable environments, or any other potentially life critical uses. Customer understands and agrees that ANYLOAD makes no assurances that the products, services or deliverables are suitable for any high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process. Although all product - related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required. Please contact authorized ANYLOAD personnel to obtain special terms and conditions regarding products designed for such applications or otherwise satisfy specific safety requirements.