

815BS

LCD Weight Indicator



Specifications

Power Supply: UL approved internal, 100VAC to 240 VAC, 50-60Hz

Power Consumption: 120VAC @ 0.1A/12VDC @ 0.5A (10W AC/5W DC)

Number of load cells: Up to 4x350Ω; 8x700Ω

Resolution: 1,000,000 internal count, with 24bits resolution

Tare Range: 100% Full Scale NTEP/MC/OIML

Working Humidity: 20% RH to 90% RH

Working Temperature: -10°C to 50°C / 15°F to 120°F

Dimensions(WxHxD): 9.1" x 7.4" x 3.0" (231 x 188 x 76mm) base included.

Features

- Built-in lithium battery (up to 400 hrs run time)
- 1.0", 6 digits, 7 segment, LCD display
- Tri color backlight: green, red, and amber
- Weather proof stainless steel enclosure, NEMA4X / IP66
- Two independent RS232 communication ports
- UL approved external wall adapter
- Developed in-house.



Green Backlight



Red Backlight



Amber Backlight




Description


The ANYLOAD 815BS LCD weight indicator is an industrial weighing indicator that provides high accuracy and reliability with multiple functions. The 815BS features the password-protected calibration menu and electronic sealing via the audit trail function. It has also advanced analog, digital and average filtering and can drive up to four 350Ω (4x350Ω) or eight 700Ω (8x700Ω) load cells. With an SS304 stainless steel wash-down enclosure, the 815BS is ideal for the food industry, agricultural industry, and industrial applications.

Diagram - 815BS

front view

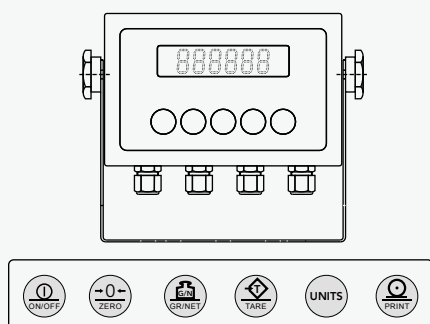

bottom view

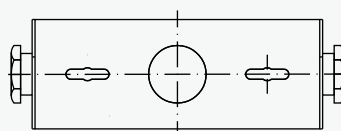

side view

