
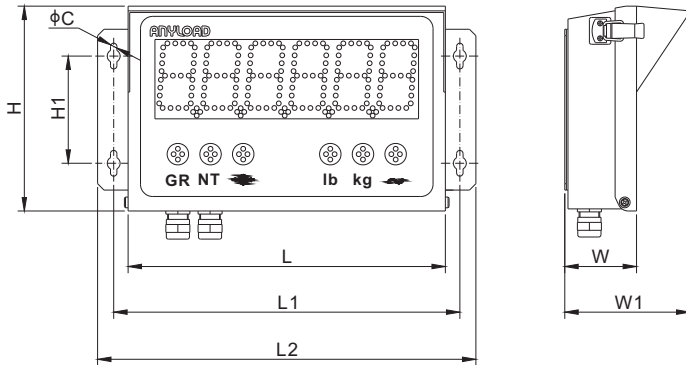


Remote Display, 2.5" Compact Model



Features:

Great Visibility:

- Single-row discrete LED
- 6 digits, 2.5" height, 7 segment
- Wide viewing 120° angle
- Two levels brightness adjustment
- Mirror display
- Grey front safety glass

Auto-Learn Technology:

- Automatically detect indicator string protocols
- Automatically set communication baud rates

Multiport Communication:

- Input: independent RS232, RS422, RS485, 20mA current loop (active or passive)
- Output: echo out and addressable multi display configuration
- Switch inputs and relay output to control traffic lights
- Lightning ESD protection for communication lines

Service Friendly:

- Modular design
- External membrane keypad
- Menu driven setup function
- Hinged front cover
- Onboard diagnostic lights for trouble shooting
- 100~240VAC internal encapsulated UL/CSA power supply

Rugged Enclosure:

- Weather proof powder coated mild steel enclosure
- Visor to protect from sun or rain shade
- Wall mounting on the back
- GORE® breather vent

DIMENSIONS

	C	H	H1	L	L1	L2	W	W1
mm	6.0	191.0	100.0	296.0	323.0	353.0	67.0	116.8
inches	0.24	7.52	3.94	11.65	12.72	13.90	2.64	4.60

SPECIFICATIONS

Enclosure Material	Powder Coated Mild Steel(IP65)	Power Supply	100-240VAC, 1.1A, 50/ 60Hz, UL approved
Display	6-digit, 7-segment, 65mm(2.5") LEDs	Operating Temp.	-40°C to 50°C (-40°F to 120°F)
Display Visibility	Max 25m(100ft) @1500mcd, 120° angle	Box Ventilation	Breather vent to avoid condensation
Status Indication	2 annunciators for Motion and Zero	Input & Output	2 dry contact switches and 1 form C relay
Communication	Independent RS232, RS422 / 485, 20mA 300, 600, ..., 9600, ..., 38400, 57600 Baud	Dimensions	296mm X 191mm X 67mm 11.65" X 7.52" X 2.64"

PART NUMBER

Part No.	Plug Type	Annumciators	Weight Approx. (kg)
808CH631-02.....	Type B	GR, NT, lb, kg.....	6.4
808CH631-02RCC.....	Type I	GR, NT, kg, t.....	6.4

All product specifications, statements, information and data (collectively, the "Information") in this catalog or made available elsewhere by ANYLOAD are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all conditions. It is the customer's responsibility to validate that a particular product with the properties described in the product specifications is suitable for use in their applications. Statements of interchangeability with other manufacturers are based on ANYLOAD's knowledge of product information at the time a publication was made, but are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another manufacturer.

Any use of product outside of specifications or any storage or installation inconsistent with product guidance voids and warranty.

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by ANYLOAD with reference to the use of ANYLOAD's products produces no obligation or liability for the advice given or results obtained.

Although ANYLOAD designs and manufactures its products to the most stringent quality and safety standards, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services or deliverables for use in high risk applications including medical life support, medical device, direct physical patient contact, water treatment, nuclear facilities, weapon systems, mass and air transportation control, flammable environments, or any other potentially life critical uses. Customer understands and agrees that ANYLOAD makes no assurances that the products, services or deliverables are suitable for any high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process. Although all product - related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required. Please contact authorized ANYLOAD personnel to obtain special terms and conditions regarding products designed for such applications or otherwise satisfy specific safety requirements.