
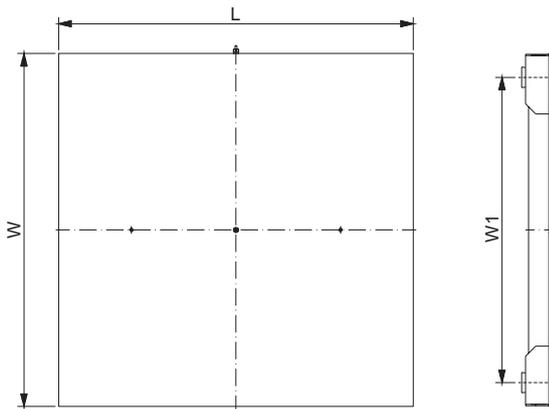


Floor Scale, Stainless Steel



Features:

- 17-4PH & 304 Stainless steel heavy-duty industrial design
- Rigid steel channel frame
- Pre-trimmed corners
- Threaded eyebolt holes for easy lifting

Complete Set Includes:

- IP68 stainless steel load cells 563YS, OIML MAA & NTEP certified
- 4 swivel stainless steel feet AMFS4 with removable rubber base
- 2 eyebolts
- 1 IP65 stainless steel junction box J04ES-FS
- 1 level bubble

DIMENSIONS

PLATFORM SIZE	H	H1	L	L1	W	W1
mm						
FSP3X3-SS-S4	107-121	84.0	914.0	750.0	914.0	750.0
FSP4X4-SS-S4	107-121	85.0	1219.0	1054.0	1219.0	1054.0
FSP5X5-SS-S4	108-122	86.0	1500.0	1300.0	1500.0	1300.0
inches						
FSP3X3-SS-S4	4.21-4.76	3.31	35.98	29.53	35.98	29.53
FSP4X4-SS-S4	4.21-4.76	3.35	47.99	41.50	47.99	41.50
FSP5X5-SS-S4	4.25-4.80	3.39	59.06	51.18	59.06	51.18

DIMENSIONS

PART NUMBER	RATED CAPACITY	DIVISION	LOAD CELL CAPACITY	SIZE IN INCHES (W x L x H)	WEIGHT	DECK PLATE THICKNESS
FSP3x3-500kg-SS-S4	500kg	0.1kg	563YS-300kg	36" x 36" x 4"	75kg / 165 lb	0.16" / 4mm
FSP3x3-1t-SS-S4	1t	0.2kg	563YS-500kg	36" x 36" x 4"	75kg / 165 lb	0.16" / 4mm
FSP3x3-2.5t-SS-S4	2.5t	0.5kg	563YS-1t	36" x 36" x 4"	75kg / 165 lb	0.16" / 4mm
FSP3x3-1Klb-SS-S4	1Klb	0.2lb	563YS-500lb	36" x 36" x 4"	75kg / 165 lb	0.16" / 4mm
FSP3x3-2Klb-SS-S4	2Klb	0.5lb	563YS-1Klb	36" x 36" x 4"	75kg / 165 lb	0.16" / 4mm
FSP3x3-5Klb-SS-S4	5Klb	1lb	563YS-2.5Klb	36" x 36" x 4"	75kg / 165 lb	0.16" / 4mm
FSP4x4-500kg-SS-S4	500kg	0.1kg	563YS-300kg	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-1t-SS-S4	1t	0.2kg	563YS-500kg	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-2.5t-SS-S4	2.5t	0.5kg	563YS-1t	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-5t-SS-S4	5t	1kg	563YS-2t	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-1Klb-SS-S4	1Klb	0.2lb	563YS-500lb	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-2Klb-SS-S4	2Klb	0.5lb	563YS-1Klb	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-5Klb-SS-S4	5Klb	1lb	563YS-2.5Klb	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP4x4-10Klb-SS-S4	10Klb	2lb	563YS-4Klb	48" x 48" x 4"	120kg/265 lb	0.20" / 5mm
FSP5x5-2.5t-SS-S4	2.5t	0.5kg	563YS-1t	59" x 59" x 4"	200kg/441 lb	0.24" / 6mm
FSP5x5-5t-SS-S4	5t	1kg	563YS-2t	59" x 59" x 4"	200kg/441 lb	0.24" / 6mm
FSP5x5-5Klb-SS-S4	5Klb	1lb	563YS-2.5Klb	59" x 59" x 4"	200kg/441 lb	0.24" / 6mm
FSP5x5-10Klb-SS-S4	10Klb	2lb	563YS-SE5Klb	59" x 59" x 4"	200kg/441 lb	0.24" / 6mm

Measurement Canada Approval for
- 3X3-5Klb - 4X4-5Klb - 5X5-5Klb

NTEP 1:5 000 Class III Approval for
- 3X3-1Klb - 4X4-1Klb - 5X5-1Klb
- 3X3-2Klb - 4X4-2Klb - 5X5-2Klb
- 3X3-5Klb - 4X4-5Klb - 5X5-5Klb
- 3X3-10Klb - 4X4-10Klb - 5X5-10Klb

OPTIONAL ACCESSORIES

- Indicators (page 188-191)
- Ramp-17 (page 215)
- Bumper Guards (page 216)

Product Datasheet Disclaimer

Information Changes:

All product specifications, statements, information, and data (collectively, the “Information”) in this catalog or made available elsewhere by ANYLOAD are subject to change. Customers must verify the applicability of the Information at the time of order placement.

Accuracy and Reliability:

While all Information is believed to be accurate and reliable, it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Laboratory Conditions:

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all metrological conditions. Users must validate that a product with the described properties is suitable for their applications.

Interchangeability:

Statements of interchangeability with other manufacturers are based on ANYLOAD’s knowledge at the time of publication and are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another Manufacturer.

Warranty Voidance:

Any use of the product outside of specifications or any storage or installation inconsistent with product guidance voids any warranty.

Intended Use:

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. ANYLOAD provides technical advice without obligation or liability for the advice given or results obtained.

Component Failures:

Although ANYLOAD designs and manufactures its products to stringent quality and safety standards, isolated component failures may still occur. Applications requiring high reliability or safety should employ suitable designs or safeguards to ensure that component failure does not result in personal injury or property damage.

High-Risk Applications:

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services, or deliverables for use in high-risk applications (e.g., medical life support, nuclear facilities, weapon systems). ANYLOAD makes no assurances that the products are suitable for high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process.

Contact authorized ANYLOAD personnel for special terms and conditions regarding products designed for specific safety requirements.

Safety Measures:

All product-related warnings, cautions, and notes must be observed. Customers should not assume that all safety measures are indicated or that other measures may not be required.

California Proposition 65:

⚠ WARNING: Some products manufactured or distributed by ANYLOAD may contain trace amounts of chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm. These substances are present in minimal quantities and are typically encapsulated within our products. This warning is provided to enable you to make informed decisions as a consumer.