
# **ANYLOAD**®

### **FSP-**Series Floor Scales





### Performance You Can Measure

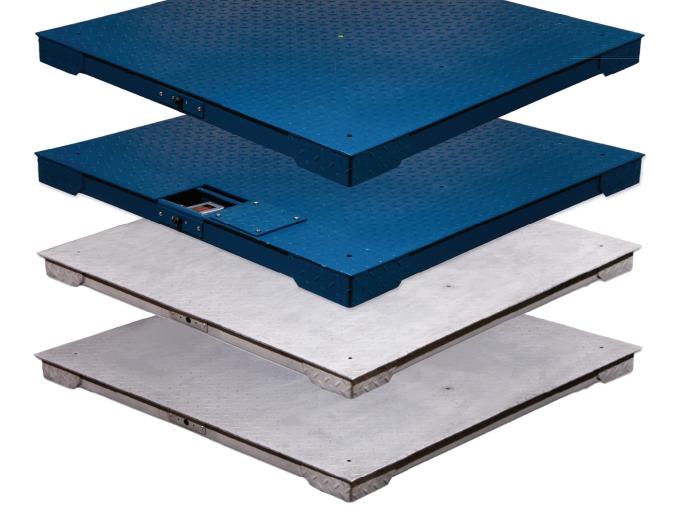





\*against all manufacturing defects

1-855-269-5623 info@anyload.com **www.anyload.com** 




## Models

ANYLOAD has designed and manufactured scales and load cells for over 30 years. Our products are trusted to provide reliable weighing to end-users in the most challenging conditions.

#### STANDARD

Model: FSP MILD STEEL All-Purpose Heavy Duty

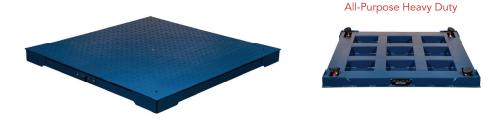

### **DUAL ACCESS**

Model: FSP-TA MILD STEEL Dual J-Box Access (Top & Side)



#### GALVANIZED

Model: FSP-GI MILD STEEL Hot Dip Galvanized Anti-Corrosion Zinc Plating








### **STAINLESS STEEL**

**Model: FSP-SS** 17-4PH aerospace and 304 foodgrade stainless steel for harshest environments









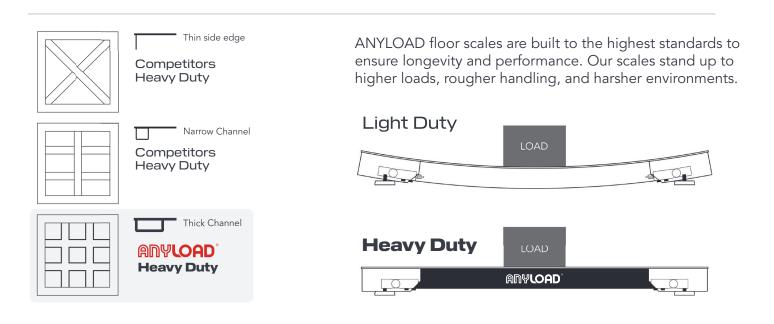



### **Features**

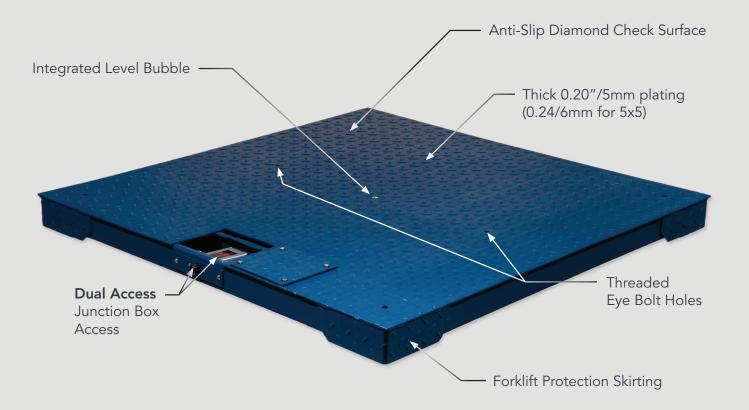



Powder-Coated Mild Steel

Anti Corrosion Galvanized Mild Steel

**Food-Grade** 304 Stainless Steel



**Demanding Environments** Industrial and Wet Conditions

#### **Self Correcting Feet** Ensure ideal loading

Ensure ideal loading under variable conditions


### Top Access

Easy Access for In-Floor Installations

> High Quality Welds Longer Service Life

### **FSP-Series** Options

### Accessories



**Bumper Guard** 



**815BS** Indicator Battery 400+ Hours



**815TS** Indicator 2 set point output relays LED Display



Notes:	
	-

Approvals:	FSP	TA	GI	SS	
NTEP-Certified, Class III 5000 (1Klb-10Klb)	•	0	0	0	
Measurement Canada (1Klb-5Klb)	<b>O</b>	0	0	<b>Ø</b>	
FM (US & Canada)	Cer	Certified Versions Available			
Features:	FSP	ТА	GI	SS	
Mild Steel	•	0	0		
Stainless Steel				Ø	
Reinforced Corner Skirting	<b>O</b>	0	0	<b>Ø</b>	
Dual Access for Junction Box		0			
Threaded Eye Bolt Holes	0	0	0	<b>Ø</b>	
Included:	FSP	ТА	GI	SS	
2x Eye Bolt	•	0	0	•	
Level Bubble	0	0	0	<b>Ø</b>	
1x IP67 Aluminum Junction Box (J04EA-16)	0	0	0		
1x IP65 Stainless Steel Junction Box (J04ES-FS)				•	
4x 563YH-23 Load Cells	<b>O</b>	0	0		
4x 563YS Load Cells				<b>Ø</b>	
4x AMFS4 Feet w/ Removable Rubber Cap				<b>Ø</b>	
4x AMF Feet w/ Removable Rubber Cap	<b>O</b>	0	0		

Model	Size	Capacity	Weight (Est.)
FSP	3'x3'	1Klb, 2Klb, 5Klb	72kg / 159lb
	4'x4'	1Klb, 2Klb, 5Klb, 10Klb	120kg / 265lb
	5′x5′	5Klb, 10Klb	200kg / 441lb
	5'x5'-LE	10Klb	210kg / 463lb
	4'x6'	5Klb, 10Klb	-
	5′x7′	5Klb, 10Klb	-
FSP-TA	4'x4'	5Klb	120kg / 265lb
FSP-GI	4'x4'	5Klb	138kg / 304lb
FSP-SS	3'x3'	1Klb, 2Klb, 5Klb	75kg / 165lb
	4'x4'	1Klb, 2Klb, 5Klb, 10Klb	120kg / 265lb
	5′x5′	5Klb, 10Klb	200kg / 441lb
	4′x6′	5Klb, 10Klb	180kg / 397lb
	5′x7′	5Klb, 10Klb	260kg / 573lb

# ANYLOAD

1-855-269-5623 info@anyload.com

#### www.anyload.com