


# ANYLOAD<sup>®</sup>

## FSP-Series Floor Scales

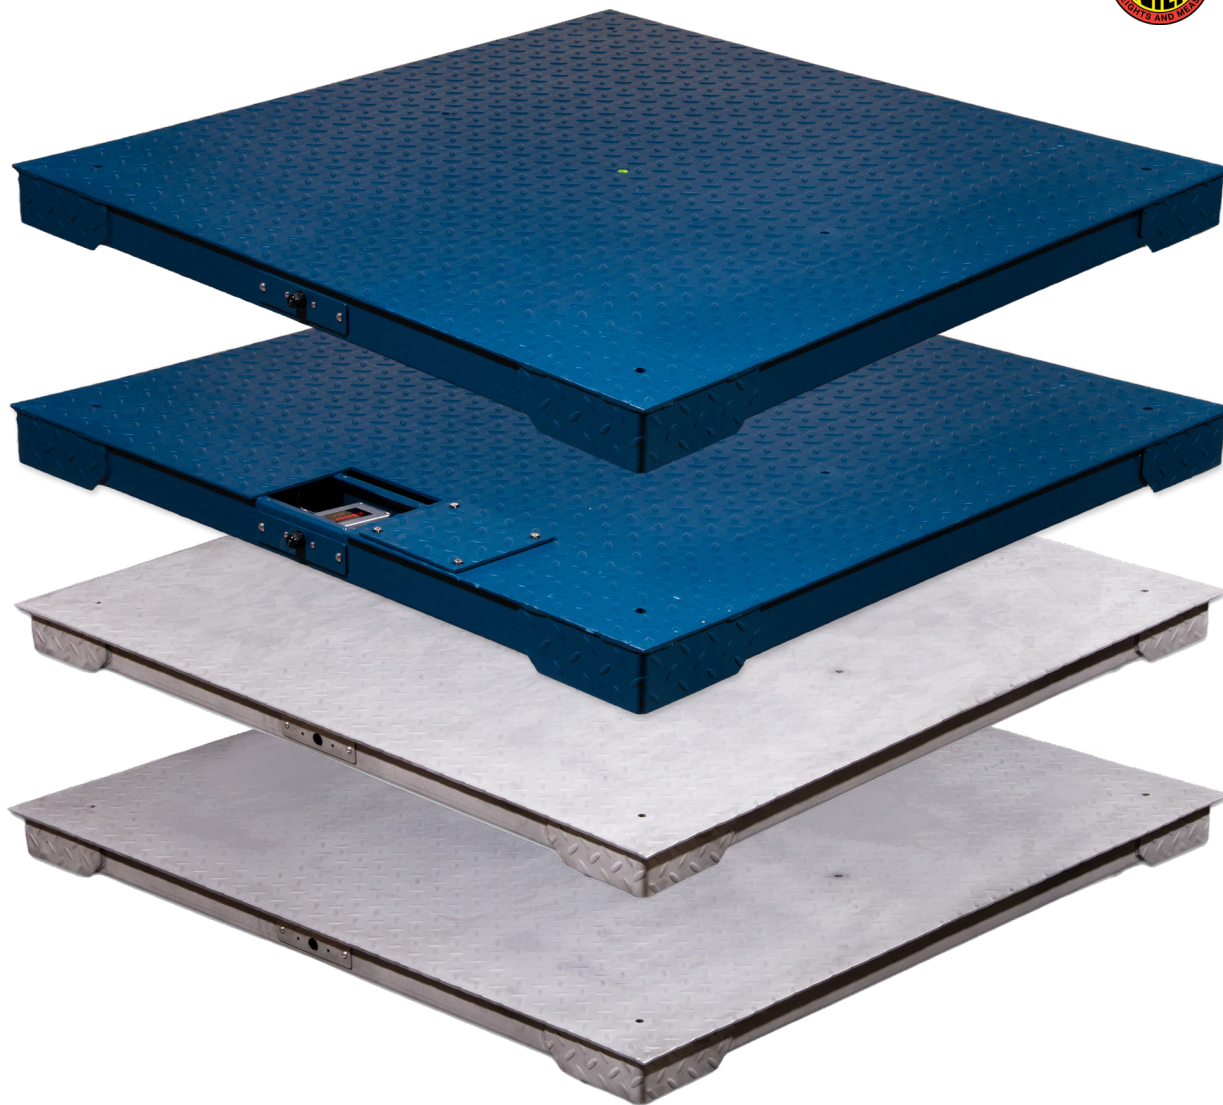

### Performance You Can Measure

## IP67

Waterproof

## 150%

Safe Overload

## 3 YEAR

Manufacturer Warranty  
\*against all manufacturing defects

1-855-269-5623  
info@anyload.com  
[www.anyload.com](http://www.anyload.com)

FSP Product Page




# Models

ANYLOAD has designed and manufactured scales and load cells for over 30 years. Our products are trusted to provide reliable weighing to end-users in the most challenging conditions.

## STANDARD

Model: FSP  
MILD STEEL  
All-Purpose Heavy Duty

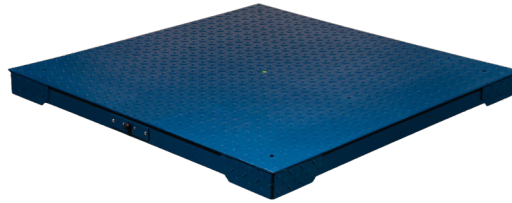


All-Purpose Heavy Duty



## DUAL ACCESS

Model: FSP-TA  
MILD STEEL  
Dual J-Box Access (Top & Side)

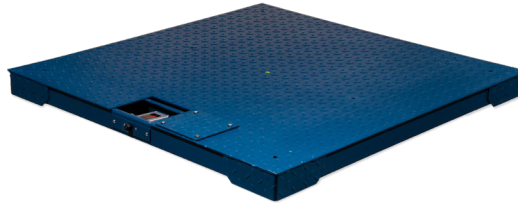

All-Purpose Heavy Duty



## GALVANIZED

Model: FSP-GI  
MILD STEEL  
Hot Dip Galvanized  
Anti-Corrosion Zinc Plating




Anti-Corrosion Coating




## STAINLESS STEEL

Model: FSP-SS  
17-4PH aerospace and 304 food-grade stainless steel for harshest environments

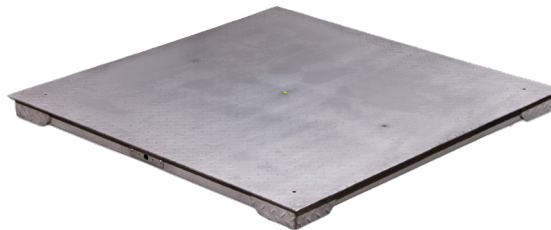


High Corrosion Resistance




Thin side edge

Competitors  
Heavy Duty



Narrow Channel

Competitors  
Heavy Duty




Thick Channel

**ANYLOAD**  
Heavy Duty

ANYLOAD floor scales are built to the highest standards to ensure longevity and performance. Our scales stand up to higher loads, rougher handling, and harsher environments.

Light Duty


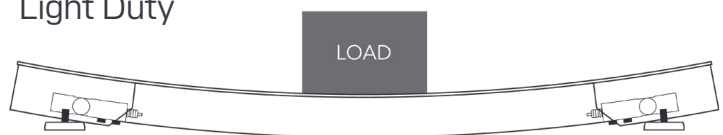


Heavy Duty







# Features

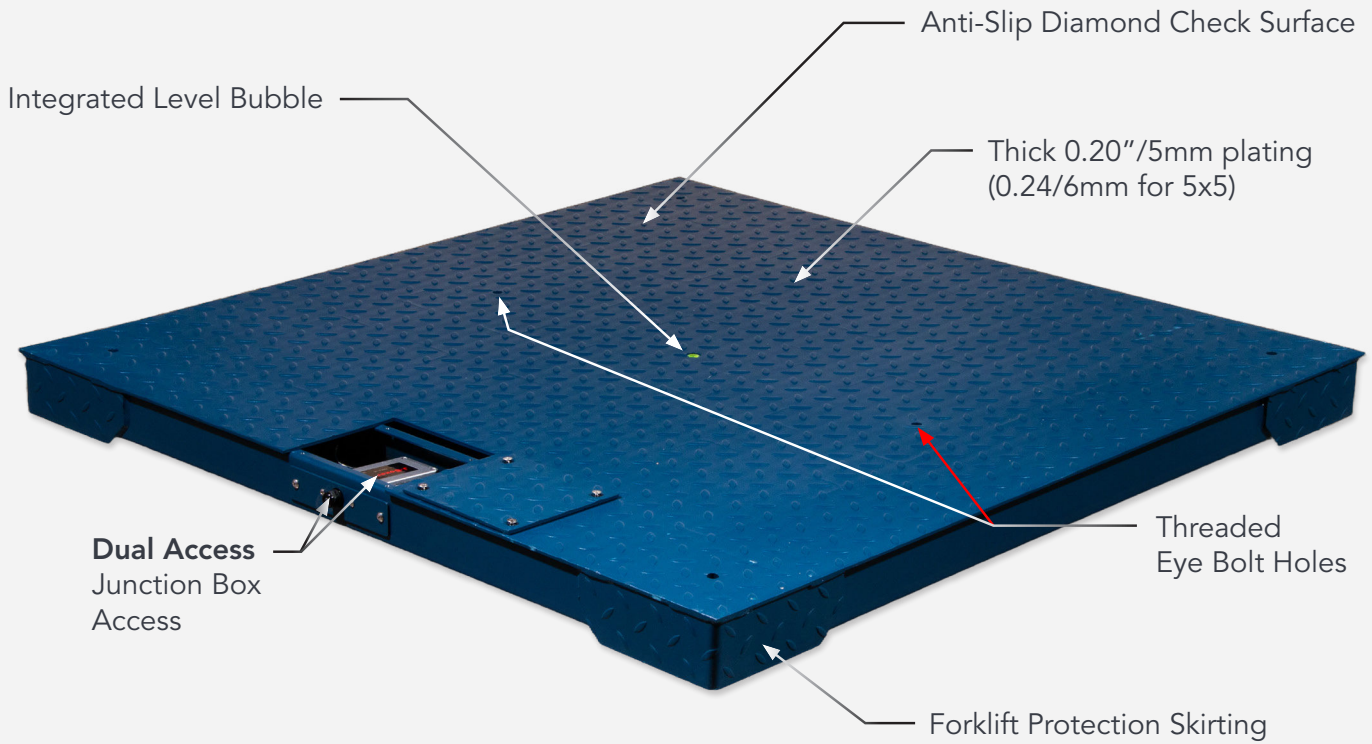

**Powder-Coated**  
Mild Steel



**Anti Corrosion**  
Galvanized Mild Steel



**Food-Grade**  
304 Stainless Steel




**Demanding Environments**  
Industrial and Wet Conditions



**Top Access**  
Easy Access for In-Floor  
Installations

**Self Correcting Feet**  
Ensure ideal loading  
under variable conditions


**High Quality Welds**  
Longer Service Life

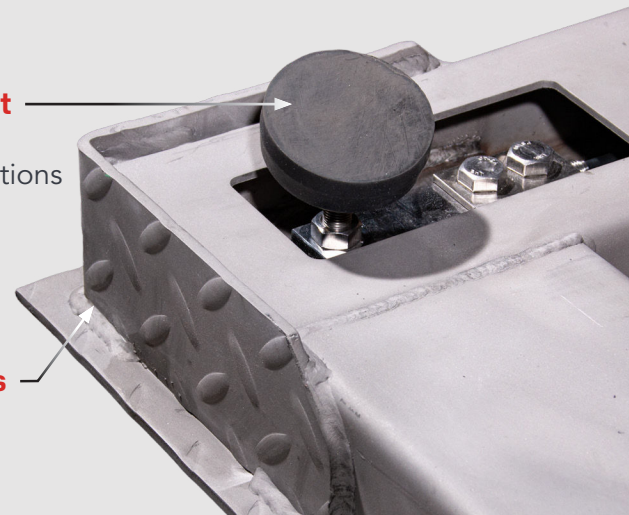

# FSP-Series Options

## Accessories

Ramp



Bumper Guard



**815BS** Indicator  
Battery  
400+ Hours



**815TS** Indicator  
2 set point output  
relays  
LED Display



### Notes:

Approvals:	FSP	TA	GI	SS
NTEP-Certified, Class III 5000 (1Klb-10Klb)	✓	✓	✓	✓
Measurement Canada (1Klb-5Klb)	✓	✓	✓	✓

*Certified Versions Available*

Features:	FSP	TA	GI	SS
Mild Steel	✓	✓	✓	
Stainless Steel				✓
Reinforced Corner Skirting	✓	✓	✓	✓
Dual Access for Junction Box		✓		
Threaded Eye Bolt Holes	✓	✓	✓	✓

Included:	FSP	TA	GI	SS
2x Eye Bolt	✓	✓	✓	✓
Level Bubble	✓	✓	✓	✓
1x IP67 Aluminum Junction Box (J04EA-16)	✓	✓	✓	
1x IP65 Stainless Steel Junction Box (J04ES-FS)				✓
4x 563YH-23 Load Cells	✓	✓	✓	
4x 563YS Load Cells				✓
4x AMFS4 Feet w/ Removable Rubber Cap				✓
4x AMF Feet w/ Removable Rubber Cap	✓	✓	✓	

Model	Size	Capacity	Weight (Est.)
<b>FSP</b>	3'x3'	1Klb, 2Klb, 5Klb	72kg / 159lb
	4'x4'	1Klb, 2Klb, 5Klb, 10Klb	120kg / 265lb
	5'x5'	5Klb, 10Klb	200kg / 441lb
	5'x5'-LE	10Klb	210kg / 463lb
	4'x6'	5Klb, 10Klb	-
	5'x7'	5Klb, 10Klb	-
<b>FSP-TA</b>	4'x4'	5Klb	120kg / 265lb
<b>FSP-GI</b>	4'x4'	5Klb	138kg / 304lb
<b>FSP-SS</b>	3'x3'	1Klb, 2Klb, 5Klb	75kg / 165lb
	4'x4'	1Klb, 2Klb, 5Klb, 10Klb	120kg / 265lb
	5'x5'	5Klb, 10Klb	200kg / 441lb
	4'x6'	5Klb, 10Klb	180kg / 397lb
	5'x7'	5Klb, 10Klb	260kg / 573lb

Sales and Technical Assistance:

**ANYLOAD**<sup>®</sup>

1-855-269-5623

info@anyload.com

[www.anyload.com](http://www.anyload.com)