

ACT1

Conditioning Transmitter, 1 Port

ANYLOAD




Features:

- **Space-saving vertical design** with DIN-rail mounting for compact control panel integration
- **High-visibility red LED display** with six semi-alphanumeric digits and dedicated indicator LEDs for weight, calibration, and error conditions
- **Comprehensive calibration options** including theoretical, real-weight and linearity calibration with intuitive push-button or preset tare functionality
- **Versatile digital-to-analog conversion** with full-scale output, zero setting, and optional network protocols (Ethernet TCP/IP, ASCII or Modbus-RTU)
- **Flexible data formatting** with configurable bit-swapping for little or big endian formats and support for RS-232 transmit or RS-485 half-duplex communication
- **Integrated digital I/O featuring** two digital inputs and three digital outputs for expanded system interfacing
- **User-friendly system management** with removable mounting hardware and free Instrument Manager software for easy configuration, calibration, and maintenance

SPECIFICATIONS

Power Supply	12-24 VDC $\pm 10\%$	Number Of Decimals	0-4
Power Consumption	5 W	Display Increments	x1x2x5x10x20x50x100
Number Of Load Cells	up to 8x350 Ω -4/6 wires; 5 VDC/120 mA	Digital Filter	10 levels
Linearity	$<0.01\%$ full scale	Readings Per Second	5-300 Hz
Thermal Drift	$<0.0005\%$ full scale/ $^{\circ}\text{C}$; $<0.003\%$ full scale/ $^{\circ}\text{C}$ (analogue only)	Max. Output Current	3-max 115 VAC/150 mA
A/D Converter	24 bit(16000000 points)-4.8 kHz	Optoisolated Digital Inputs	2-5-24 VDC PNP
Divisions(with measurement range $\pm 10\text{mV}$ and sensitivity 2mV/V)	$\pm 999999 \cdot 0.01 \mu\text{V/d}$	Serial Ports	RS-485
Input Range	$\pm 39 \text{ mV}$	Baud Rate	2400, 4800, 9600, 19200, 38400, 115200(bit/s)
Usable Load Cells Sensitivity	$\pm 7 \text{ mV/V}$	Analog Output(analogue only)	16 bit=65535 divisions. 0-20 mA; 4-20 mA(up to 300 Ω) 0-10 V; 0-5 V; $\pm 10 \text{ V}$; $\pm 5 \text{ V}$ (min 10 k Ω)
Conversions Per Second	Max 300/s	Humidity	85% (non condensing)
		Operating Temperature Range	-4 $^{\circ}\text{F}$ to 140 $^{\circ}\text{F}$ / -20 $^{\circ}\text{C}$ to 60 $^{\circ}\text{C}$
		Storage Temperature	-22 $^{\circ}\text{F}$ to 176 $^{\circ}\text{F}$ / -30 $^{\circ}\text{C}$ to 80 $^{\circ}\text{C}$

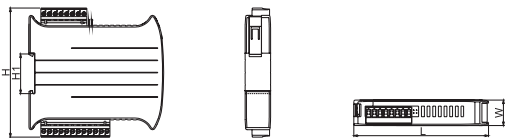

DIMENSIONS

H	4.49 inch (114.0 mm)	H1	1.38 inch (35.0 mm)
L	4.72 inch (120.0 mm)	W	0.89 inch (22.5 mm)

PART NUMBER

Part No.	Communication	Weight Approx. (lb)
ACT1-ANA.....	Analogue.....	1.0
ACT1-AEHT.....	Ethernet TCP/IP.....	1.0

AVAILABLE UPON REQUEST

Part No.	Communication
ACT1-A485.....	RS485
ACT1-ACAN.....	CANopen
ACT1-ACCL.....	CC-Link
ACT1-ADEN.....	DeviceNet
ACT1-AEHC.....	EtherCAT
ACT1-AEHI.....	Ethernet/IP
ACT1-AMDT.....	Modbus/TCP
ACT1-APFD.....	Profibus DP
ACT1-APFI.....	Profibus IO
ACT1-APWL.....	PowerLink
ACT1-ASES.....	Sercos III

Product Datasheet Disclaimer

Information Changes:

All product specifications, statements, information, and data (collectively, the “Information”) in this catalog or made available elsewhere by ANYLOAD are subject to change. Customers must verify the applicability of the Information at the time of order placement.

Accuracy and Reliability:

While all Information is believed to be accurate and reliable, it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Laboratory Conditions:

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all metrological conditions. Users must validate that a product with the described properties is suitable for their applications.

Interchangeability:

Statements of interchangeability with other manufacturers are based on ANYLOAD’s knowledge at the time of publication and are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another Manufacturer.

Warranty Voidance:

Any use of the product outside of specifications or any storage or installation inconsistent with product guidance voids any warranty.

Intended Use:

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. ANYLOAD provides technical advice without obligation or liability for the advice given or results obtained.

Component Failures:

Although ANYLOAD designs and manufactures its products to stringent quality and safety standards, isolated component failures may still occur. Applications requiring high reliability or safety should employ suitable designs or safeguards to ensure that component failure does not result in personal injury or property damage.

High-Risk Applications:


Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services, or deliverables for use in high-risk applications (e.g., medical life support, nuclear facilities, weapon systems). ANYLOAD makes no assurances that the products are suitable for high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process.

Contact authorized ANYLOAD personnel for special terms and conditions regarding products designed for specific safety requirements.

Safety Measures:

All product-related warnings, cautions, and notes must be observed. Customers should not assume that all safety measures are indicated or that other measures may not be required.

California Proposition 65:

 **WARNING:** Some products manufactured or distributed by ANYLOAD may contain trace amounts of chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm. These substances are present in minimal quantities and are typically encapsulated within our products. This warning is provided to enable you to make informed decisions as a consumer.