



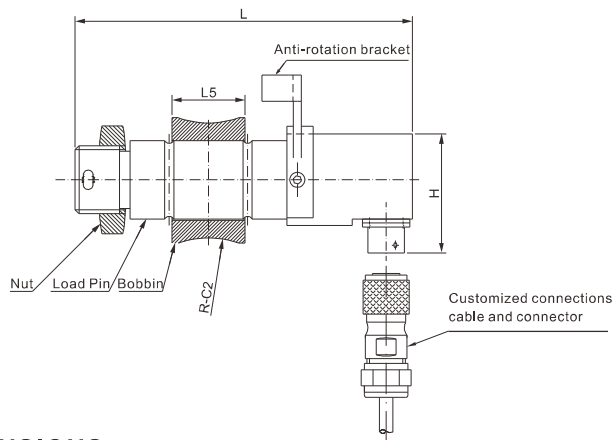

CE RoHS

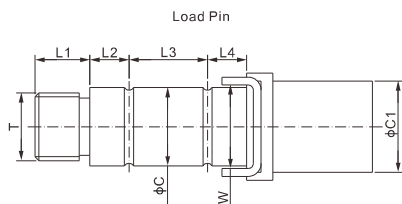


DIMENSIONS													SUGGESTED SHACKLE
RATED CAPACITY	C	C1	C2	H	L	L1	L2	L3	L4	L5	W	T	
t/mm													
5	30.0	35.0	R35.0	45.5	129.0	21.0	15.0	30.0	15.0	28.0	32.0	M26X1.5	Crosby G-416-27t
lb/inches	(conversion of above dimensions)												
11	1.18	1.38	R1.38	1.79	5.08	0.83	0.59	1.18	0.59	1.10	1.26	M26X1.5	Crosby G-416-27t

SPECIFICATIONS			
Rated Output	4-20mA*	Recommended Excitation	24V
Non-linearity	<±2.0%FS	Insulation Resistance	>2[50V DC] GΩ
Repeatability	<±0.3%FS	Compensated Temperature Range	-40°C - 40°C / -40°F -104°F (Max 250°C)
Hysteresis Error	<±2.0%FS	Safe Overload	150%of full scale
Creep in 30 min.	<±1.0%FS	Breaking Overload	300%of full scale (Max 500%)
Element Material	2Cr13 Stainless Steel	Seal Type / IP Rating	Environmentally Sealed / IP67

* Built-in amplifier output signal, output range can be selected

PART NUMBER		
Rated Capacity	Part No.	Weight Approx. (kg)
5t	535TS2901AM-5t-416	0.8

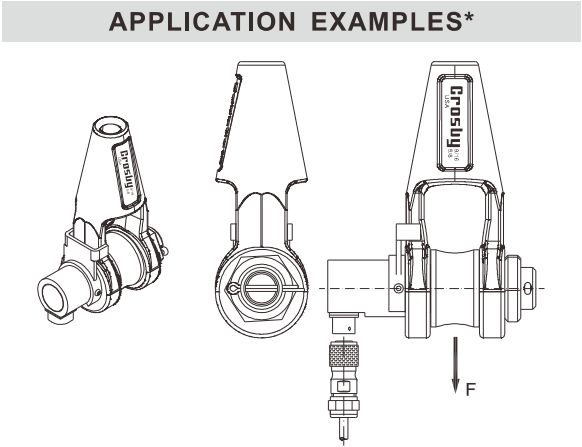

* The load cell can be customized according to the shackle specifications

LOAD PINS