


Description:

High-Temperature and Vacuum Shear Beam Load Cells from ANYLOAD are designed for environments where standard sensors fall short. Built for aerospace, semiconductor manufacturing, metallurgy, and advanced research, they provide the accuracy and stability needed under extreme thermal and pressure conditions, while offering the flexibility to be configured for unique project requirements.

Unlike off-the-shelf solutions, these load cells are engineered to order, with options for vacuum operation down to 1Pa ($\approx 7.5 \times 10^{-3}$ Torr), compensated temperature ranges from -10°C to 150°C (operational up to 200°C), and customized mechanical and electrical interfaces. Their sealed cavities and low-outgassing construction make them suitable for vacuum chambers, space simulation facilities, and semiconductor process equipment, while repeatable performance is ensured even under rapid cycling between pressurized and vacuum states.

Because they are derived from proven ANYLOAD shear beam architectures, these products combine a dependable mechanical foundation with the ability to adapt to special applications. Whether you need modifications in geometry, mounting, temperature compensation, or electrical output, our engineering team works directly with customers to deliver solutions that align with system-level requirements.


For engineers, researchers, and procurement specialists facing demanding conditions, ANYLOAD's high-temperature and vacuum shear beam load cells provide a configurable platform for precision measurement in the harshest environments. Submit an inquiry to discuss how we can tailor a solution for your application.

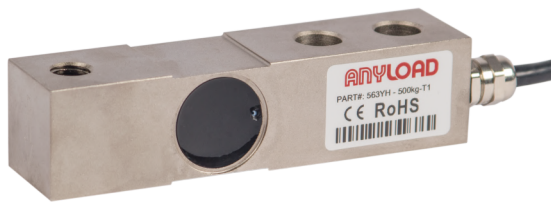

Features:

- Applications: aerospace, semiconductor manufacturing, metallurgy, advanced research, etc.
- Special configuration based on the proven 563YH load cell platform, engineered for demanding vacuum and high-temperature applications
- Vacuum-compatible (option): Sealed internal cavities and low-outgassing construction for dynamic vacuum environments down to 1 Pa ($\approx 7.5 \times 10^{-3}$ Torr)*, rated for repeated vacuum cycling.
- High Temperature Resistance (option): Compensated range* -10°C to 150°C, operational up to 200°C

* Without material effect on weighing accuracy for most applications. Please contact us for more info.

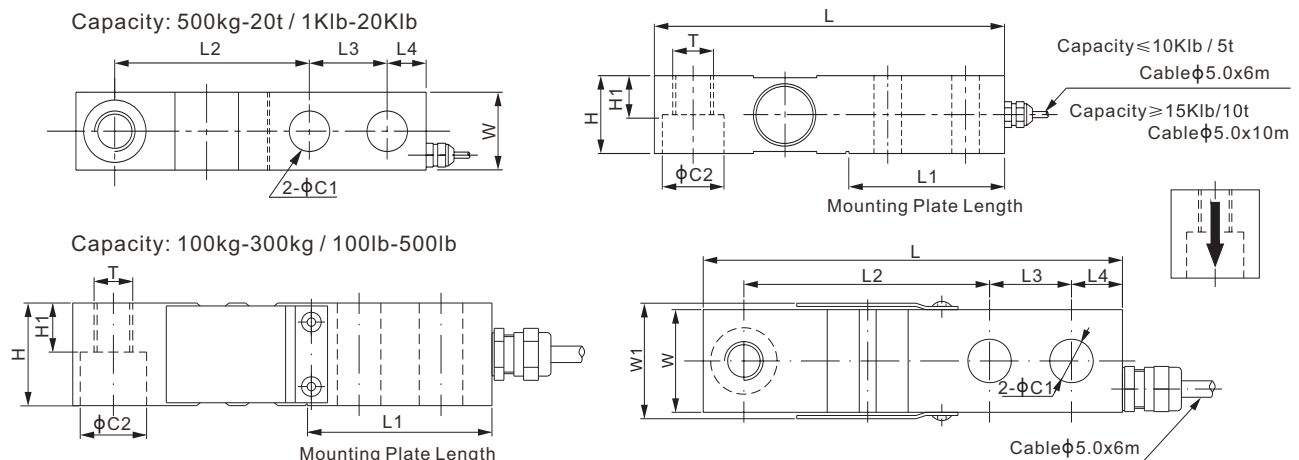

DIMENSIONS

RATED CAPACITY	C1	C2	H	H1	L	L1	L2	L3	L4	W	W1	T
lb/inches												
100-500	0.53	0.81	1.25	0.60	5.12	2.25	3.00	1.00	0.62	1.25	1.42	1/2-20 UNF-2B
1,000-4,000; SE5,000	0.53	0.81	1.25	0.60	5.12	2.25	3.00	1.00	0.62	1.25	-	1/2-20 UNF-2B
5,000-10,000	0.78	1.19	1.50	0.75	6.75	3.00	3.75	1.50	0.75	1.50	-	3/4-16 UNF-2B
15,000-20,000	1.03	1.81	2.00	1.00	8.75	4.00	4.75	2.00	1.00	2.00	-	1-14 UNS-2B
kg/mm												
100-300	13.5	20.6	31.8	15.2	130.0	57.2	76.2	25.4	15.8	31.8	36.0	M12X1.75
500-2,000	13.5	20.6	31.8	15.2	130.0	57.2	76.2	25.4	15.8	31.8	-	M12X1.75
2,500; 3,000; 5,000	19.8	30.2	38.1	19.1	171.5	76.2	95.3	38.1	19.1	38.1	-	M18X1.50
10,000	26.2	46.0	50.8	25.4	222.3	101.6	120.7	50.8	25.4	50.8	-	M24X2.00
20,000	30.2	50.0	58.0	32.0	241.5	110.0	132.0	55.0	27.5	58.0	-	M36X2.00

SPECIFICATIONS

Full Scale Output	3.0 mV/V $\pm$ 0.25%	Recommended Excitation	10V (15V Maximum)
Zero Balance	$\pm$ 0.02 mV/V	Compensated Temperature Range	-10°C to 150°C / 14°F to 302°F (Customizable up to 200°C)
Non-linearity	$\leq$ $\pm$ 0.17%	Safe Overload	150% of full scale
Repeatability	$\leq$ $\pm$ 0.17%	Breaking Overload	300% of full scale
Hysteresis Error	$\leq$ $\pm$ 0.17%	Seal Type / IP Rating	Cap. $\leq$ 300kg / 500lb: Environmentally Sealed / IP66 Cap. $\geq$ 500kg / 1Klb: Environmentally Sealed / IP67 (Custom vacuum-Sealed version)
Creep in 30 min.	$\leq$ $\pm$ 0.23%	Cable Color Code	Exc+ Red Exc- Black Sig+ Green Sig- White Shield Bare
Input Resistance	400 Ω $\pm$ 20 for kg; 350 Ω $\pm$ 7 for lb		
Output Resistance	350 Ω $\pm$ 3		
Insulation Resistance	$>2[50V DC] G\Omega$		
Cable Material	Custom high-temperature wire		

PART NUMBER

Load Cell Model	OPTIONS					Approx. Unit Weight
	Element Material	High Temp	Vacuum- Compatible	ATEX, FM, IECEx Approved *	Capacities	
563Y	S = Stainless Steel (or) H = Alloy Steel (or) A = Aluminum	As1 = 100°C (or) AS2 = 150°C (or) AS3 = 200°C	VAC	Ex	100lb, 500lb, 1Klb, 2.5Klb	1.0kg / 2.2lb
					LE2.5Klb	1.7kg / 3.7lb
					4Klb, SE5Klb	1.0kg / 2.2lb
					5Klb, 10Klb	1.8kg / 4.0lb
					15Klb, 20Klb	4.0kg / 8.8lb
					100kg, 500kg, 2t	1.0kg / 2.2lb
					2.5t, 3t, 5t	1.8kg / 4.0lb
					10t	4.0kg / 8.8lb
					20t	5.6kg / 12.3lb

SE refers to small envelope, LE for large envelope (size of metal element)

*ATEX, FM, IECEx approved versions carry the "-EX" suffix; approval only effective when operating within -40°C to 60°C

WEIGH MODULE



■ 563YHM2



■ 563YHM4-02



250lb-2.5Klb & 200kg-1t: NTEP 1:5 000 Class III, Single Cell;
NTEP 1:9 500 Class III, Multiple Cell
4Klb-20Klb & 2t-5t: NTEP 1:6 000 Class III, Single Cell;
NTEP 1:10 000 Class III, Multiple Cell
only applicable to the temperature range of -40°C to 60°C



1Klb-5Klb & 500kg-2.5t: OIML MAA C4, Y=15 000;
10Klb-20Klb & 3t-10t: OIML MAA C6, Y=8 500
only applicable to the temperature range of -40°C to 60°C

For further available P/N's & specifications , please contact us.

Product Datasheet Disclaimer

Information Changes:

All product specifications, statements, information, and data (collectively, the “Information”) in this catalog or made available elsewhere by ANYLOAD are subject to change. Customers must verify the applicability of the Information at the time of order placement.

Accuracy and Reliability:

While all Information is believed to be accurate and reliable, it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Laboratory Conditions:

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all metrological conditions. Users must validate that a product with the described properties is suitable for their applications.

Interchangeability:

Statements of interchangeability with other manufacturers are based on ANYLOAD’s knowledge at the time of publication and are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another Manufacturer.

Warranty Voidance:

Any use of the product outside of specifications or any storage or installation inconsistent with product guidance voids any warranty.

Intended Use:

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. ANYLOAD provides technical advice without obligation or liability for the advice given or results obtained.

Component Failures:

Although ANYLOAD designs and manufactures its products to stringent quality and safety standards, isolated component failures may still occur. Applications requiring high reliability or safety should employ suitable designs or safeguards to ensure that component failure does not result in personal injury or property damage.

High-Risk Applications:

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services, or deliverables for use in high-risk applications (e.g., medical life support, nuclear facilities, weapon systems). ANYLOAD makes no assurances that the products are suitable for high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process.

Contact authorized ANYLOAD personnel for special terms and conditions regarding products designed for specific safety requirements.

Safety Measures:

All product-related warnings, cautions, and notes must be observed. Customers should not assume that all safety measures are indicated or that other measures may not be required.

California Proposition 65:

 **WARNING:** Some products manufactured or distributed by ANYLOAD may contain trace amounts of chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm. These substances are present in minimal quantities and are typically encapsulated within our products. This warning is provided to enable you to make informed decisions as a consumer.