


Scale Integrator, Touch Screen

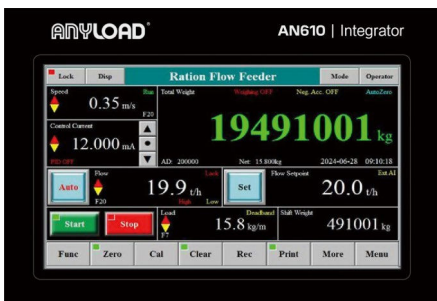

INDICATORS

Features:


- High accuracy ADC for precise weight measurement
- Configurable anti-vibration digital filtering for stable readings
- Parameters and calibration settings accessible from the front display
- Printer format control
- PID controllable output functions
- Storage of records by shift, day, or month
- 3x normally open switch inputs
- 3x normally open transistor outputs
- 3x analogue signal outputs
- EMC design with high anti-jamming capability for industrial environments
- Functions: auto zero tracking, batch weighing, flow weighing/control, speed measurement, tare, print interface, shift records

Applications:

- Belt weigher with weight totalizing
- Ration belt weighfeeder with flow feeding
- Loss-in-weight weighfeeder with flow feeding

SPECIFICATIONS

Power Supply & Consumption	24 ± 20% VDC, 10W
Excitation Voltage	10 VDC, up to 8 × 350Ω
Analog Signal Input Range	0 - 31mV
Non-Linearity	0.005% FS
Display Type	7" TFT touch screen
CPU	Cortex-A8, 600MHz clock, 128M Flash
Resolution	Display: 99,999,999
A/D Sample Rate	400 Hz
Units of Measurement	lb, Klb, g, kg, t
Communication	RS-485, Profibus-DP, Profinet,
Ports (Options)	Ethernet Modbus TCP
Speed Sensor Excitation Voltage/Current	12 VDC/ 100mA
Speed Signal Input Range	0.5 - 3000Hz
Print Port	RS-232
Working Temperature	-13°F to 113°F / -25°C to 45°C
IP Rating	IP65 front panel IP54 unit enclosure
Enclosure material	Stainless Steel

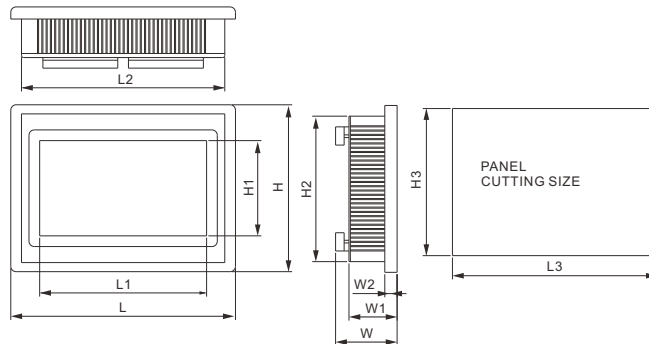

DIMENSIONS

L	8.27in (210.0mm)	H2	5.35in (136mm)
L1	6.14in (156.0mm)	H3	5.41in (137.5mm)
L2	7.48in (190.0mm)	W	2.26in (57.5mm)
L3	7.54in (191.5mm)	W1	1.77in (45.0mm)
H	6.14in (156.0mm)	W2	0.45in (11.5mm)
H1	3.50in (89.0mm)		

PART NUMBER

Part No.	Communication
AN610-485-A.....	RS-485
AN610-PFD-A.....	Profibus DP
AN610-PFN-A.....	Profinet
AN610-EMT-A.....	Ethernet Modbus TCP

Product Datasheet Disclaimer

Information Changes:

All product specifications, statements, information, and data (collectively, the “Information”) in this catalog or made available elsewhere by ANYLOAD are subject to change. Customers must verify the applicability of the Information at the time of order placement.

Accuracy and Reliability:

While all Information is believed to be accurate and reliable, it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Laboratory Conditions:

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all metrological conditions. Users must validate that a product with the described properties is suitable for their applications.

Interchangeability:

Statements of interchangeability with other manufacturers are based on ANYLOAD’s knowledge at the time of publication and are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another Manufacturer.

Warranty Voidance:

Any use of the product outside of specifications or any storage or installation inconsistent with product guidance voids any warranty.

Intended Use:

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. ANYLOAD provides technical advice without obligation or liability for the advice given or results obtained.

Component Failures:

Although ANYLOAD designs and manufactures its products to stringent quality and safety standards, isolated component failures may still occur. Applications requiring high reliability or safety should employ suitable designs or safeguards to ensure that component failure does not result in personal injury or property damage.

High-Risk Applications:

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services, or deliverables for use in high-risk applications (e.g., medical life support, nuclear facilities, weapon systems). ANYLOAD makes no assurances that the products are suitable for high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process.

Contact authorized ANYLOAD personnel for special terms and conditions regarding products designed for specific safety requirements.

Safety Measures:

All product-related warnings, cautions, and notes must be observed. Customers should not assume that all safety measures are indicated or that other measures may not be required.

California Proposition 65:

⚠ WARNING: Some products manufactured or distributed by ANYLOAD may contain trace amounts of chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm. These substances are present in minimal quantities and are typically encapsulated within our products. This warning is provided to enable you to make informed decisions as a consumer.