

HSP Series

Hygienic Scale, Stainless Steel





Features:

- Hygienic design for easy cleaning and contamination control
- Suitable for wet and sanitary environments
- Low-profile, ergonomic platform
- Hydraulic cylinder lifting mechanism
- Adjustable foot height about 5mm (0.2") for level installation
- Stainless steel SS304 construction, IP68 rating

Options:

- Stainless steel SS316 construction, IP68 rating
- IP69K rating for high-pressure washdown applications with Stainless steel SS304 or SS316 construction
- Multiple surface treatments: Sandblasted, Mirror Polished, etc.
- Mounting stand for the display indicator

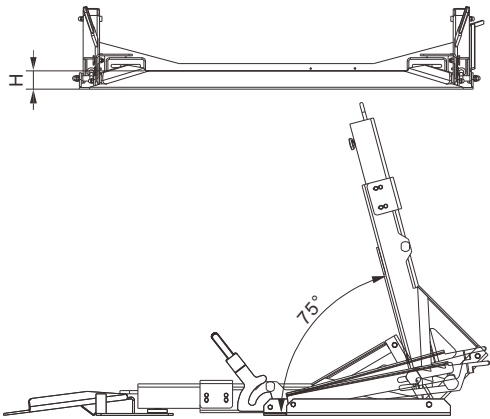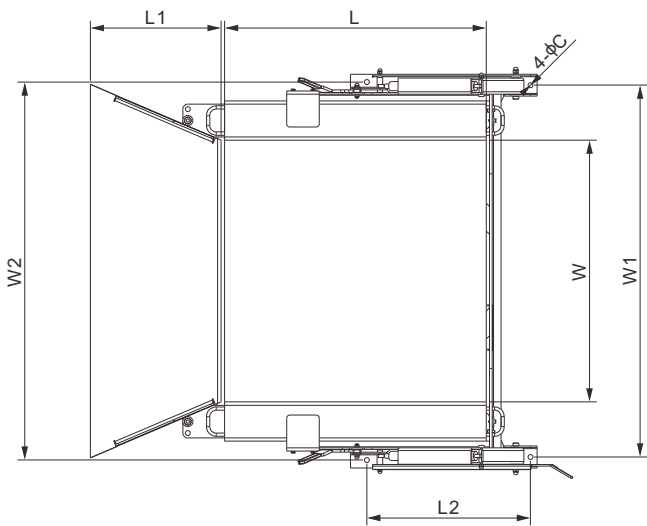

DIMENSIONS

PLATFORM SIZE CODE	L	L1	L2	W	W1	W2	H	C
mm								
08A	850	400	500	850	1186	1205	56	15
10A	1000	400	500	1000	1336	1355	56	15
12A	1250	400	500	1250	1586	1605	56	15
15A	1500	400	500	1250	1586	1605	56	15
inches (conversion of above dimensions)								
08A	33.46	15.75	19.69	33.46	46.69	47.44	2.20	0.59
10A	39.37	15.75	19.69	39.37	52.60	53.35	2.20	0.59
12A	49.21	15.75	19.69	49.21	62.44	63.19	2.20	0.59
15A	59.06	15.75	19.69	49.21	62.44	63.19	2.20	0.59

HSP4B - Stainless Steel SS304, Sandblasted

SPECIFICATIONS

Model Name	Rated Capacity	Division	Load Cell Capacity	Platform Size (L × W)	Weight Approx.
HSP4B-08A	1Klb / 500kg	0.2lb / 0.1kg	563YSMT-500lb	33.46"×33.46" / 850×850mm	353lb / 160kg
HSP4B-10A	1Klb / 500kg	0.2lb / 0.1kg	563YSMT-500lb	39.37"×39.37" / 1000×1000mm	414lb / 188kg
HSP4B-10A	2.5Klb / 1000kg	0.5lb / 0.2kg	563YSMT-1.25Klb	39.37"×39.37" / 1000×1000mm	414lb / 188kg
HSP4B-12A	1Klb / 500kg	0.2lb / 0.1kg	563YSMT-500lb	49.21"×49.21" / 1250×1250mm	545lb / 247kg
HSP4B-12A	2.5Klb / 1000kg	0.5lb / 0.2kg	563YSMT-1.25Klb	49.21"×49.21" / 1250×1250mm	545lb / 247kg
HSP4B-15A	1Klb / 500kg	0.2lb / 0.1kg	563YSMT-500lb	59.06"×49.21" / 1500×1250mm	604lb / 274kg
HSP4B-15A	2.5Klb / 1000kg	0.5lb / 0.2kg	563YSMT-1.25Klb	59.06"×49.21" / 1500×1250mm	604lb / 274kg

OTHER MATERIAL & SURFACE TREATMENT OPTIONS

Model	Note
HSP4B	Stainless Steel SS304, Sandblasted
HSP4C	Stainless Steel SS304, Sandblasted with Ceramic Shot
HSP4E	Stainless Steel SS304, Electropolished
HSP4M	Stainless Steel SS304, Mirror Polished
HSP6B	Stainless Steel SS316, Sandblasted
HSP6C	Stainless Steel SS316, Sandblasted with Ceramic Shot
HSP6E	Stainless Steel SS316, Electropolished
HSP6M	Stainless Steel SS316, Mirror Polished

OPTIONAL ACCESSORIES

- Indicators: 815BS, 815TS; (IP66)
- Indicator Stand



Product Datasheet Disclaimer

Information Changes:

All product specifications, statements, information, and data (collectively, the “Information”) in this catalog or made available elsewhere by ANYLOAD are subject to change. Customers must verify the applicability of the Information at the time of order placement.

Accuracy and Reliability:

While all Information is believed to be accurate and reliable, it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Laboratory Conditions:

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all metrological conditions. Users must validate that a product with the described properties is suitable for their applications.

Interchangeability:

Statements of interchangeability with other manufacturers are based on ANYLOAD’s knowledge at the time of publication and are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another Manufacturer.

Warranty Voidance:

Any use of the product outside of specifications or any storage or installation inconsistent with product guidance voids any warranty.

Intended Use:

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. ANYLOAD provides technical advice without obligation or liability for the advice given or results obtained.

Component Failures:

Although ANYLOAD designs and manufactures its products to stringent quality and safety standards, isolated component failures may still occur. Applications requiring high reliability or safety should employ suitable designs or safeguards to ensure that component failure does not result in personal injury or property damage.

High-Risk Applications:

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services, or deliverables for use in high-risk applications (e.g., medical life support, nuclear facilities, weapon systems). ANYLOAD makes no assurances that the products are suitable for high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process.

Contact authorized ANYLOAD personnel for special terms and conditions regarding products designed for specific safety requirements.

Safety Measures:

All product-related warnings, cautions, and notes must be observed. Customers should not assume that all safety measures are indicated or that other measures may not be required.

California Proposition 65:

 **WARNING:** Some products manufactured or distributed by ANYLOAD may contain trace amounts of chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm. These substances are present in minimal quantities and are typically encapsulated within our products. This warning is provided to enable you to make informed decisions as a consumer.