


## OCSD Series


### OCSD Indicator P180

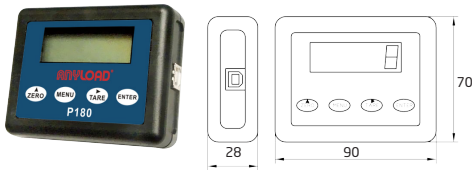

#### FEATURES

- **Palm Size:** small size enclosure of only 28X70X-90mm which is easy for carrying around
- **Wireless two way communication:** can do tare, zero scale, calibration and parameter setting
- **Display:** five 12mm high LCD digits with backlight which can show the status of battery power, tare, zero, peak and stable
- **USB Port:** equipped with USB port for easy connection and communication with PC
- **Power Supply:** power supply through USB connection or Lithium battery (included)
- **Operating Temperature:** -20°C to 60°C
- **Antenna:** concealed antenna as an integral part of the receiver
- **Updating Rate:** 12 times per second from load cell
- **Radio Frequency:** 2.4GHz wireless transmission of up to 70m distance and 128 available channels. 433MHz or 868MHz transmission frequency is available upon request


### OCSD Indicator P380

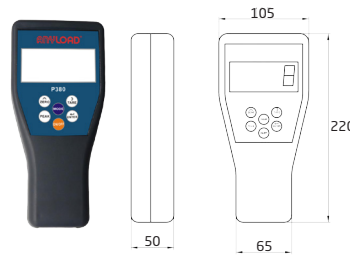

#### FEATURES

- **Hand Held Size:** the enclosure is 220X105X50 and is designed for comfortable handheld operation
- **Wireless two way communication:** can do tare, zero scale, calibration and parameter setting
- **Display:** five 25mm high LCD digits with backlight which can show the status of battery power, tare, zero, peak and stable
- **Battery:** four AA size alkaline batteries can allow 50 hours continuous operation
- **Relay Setting:** one programmable set point is available for safety or other control operations
- **Communication:** RS232 communication port is available for easy extract of data or printing operation, continuous output can drive a scoreboard
- **Operating Temperature:** -20°C to 60°C
- **Antenna:** concealed antenna as an integral part of the receiver
- **Updating Rate:** 12 times per second from load cell
- **Radio Frequency:** 2.4GHz wireless transmission of up to 70m distance and 128 available channels. 433MHz or 868MHz transmission frequency is available upon request

### OCSD Indicator P580

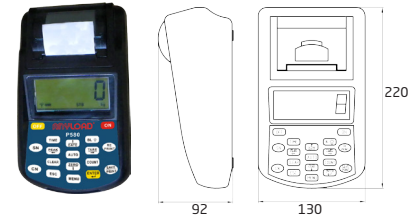

#### FEATURES

- **Portable Size with Printer:** the receiver is equipped with a printer and is designed for easy carrying in a leather bag provided
- **Wireless two way communication:** can do tare, zero scale, calibration and parameter setting
- **Display:** five 25mm high LCD digits with backlight which can show the status of battery power, tare, zero, peak and stable
- **Keyboard function:** can print data, time, serial number, commodity number, net weight and total weight, can take up to 16 digits heading information, and store up to 2,000 weigh records
- **Battery:** equipped with a high performance, SC type industrial Ni-H battery which can be recharged for 1,000 cycles, a fully recharged battery can provide 50 hours normal operation
- **Printer:** Fujitsu FTP-680 2" high speed thermal printer
- **CPU:** ARM based 32 bit MCU combines with high performance, real time capability, low power and low voltage operation
- **Communication:** both RS232 serial port and USB port are provided for flexible connection with laptops
- **Operating Temperature:** -20°C to 60°C
- **Antenna:** concealed antenna as an integral part of the receiver
- **Updating Rate:** 12 times per second from load cell
- **Radio Frequency:** 2.4GHz wireless transmission of up to 70m distance and 128 available channels. 433MHz or 868MHz transmission frequency is available upon request