


FSP-SS Series

FEATURES

- 17-4PH & 304 Stainless steel heavy-duty industrial design
- 4mm thick deck plate with checkered safety tread
- Rigid steel channel frame
- Pre-corner error adjustment
- Threaded eyebolt holes for easy lifting (eyebolts included)
- Installed with:
 - * 4 high accuracy IP68 stainless steel shear beam load cells (563YS) (OIML MAA C6, Y=8,500 and NTEP 1:6000 Class III, Multiple Cell)
 - * 4 swivel stainless steel feet with removable rubber base (AMFSS-S4)
 - * 1 IP68 stainless steel 4-way junction box (J04ES-FS)
 - * 2 eyebolts
 - * Level bubble
- Measurement Canada approved: NTEP approved:
 - 4'X4', 5Klb - 4'X4', 5Klb
 - 5'X5', 5Klb

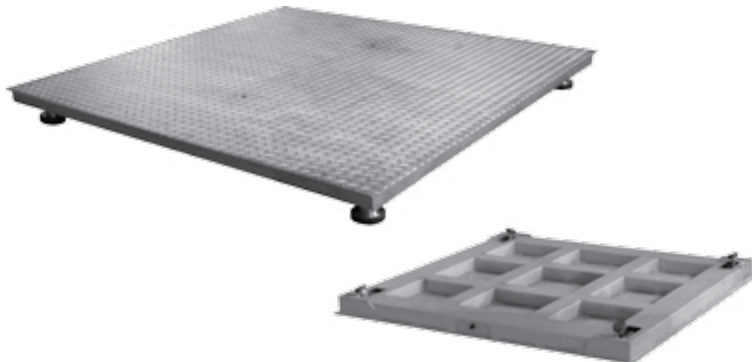

Part#	FSP4X4-5Klb-SS-S4	FSP5X5-5Klb-SS-S4
Capacity	5000 lb	5000 lb
Division	1 lb	1 lb
Platform Size	48 in X 48 in / 121.9 cm X 121.9 cm	59 in X 59 in / 150 cm X 150 cm
Platform Material	Stainless Steel	Stainless Steel
Net Weight	265 lb / 120kg	441 lb / 200kg
Operating Temp.	0 - 40°C / 32 - 104 °F	0 - 40°C / 32 - 104 °F

*Dimensions and specifications are subject to change without notice.