


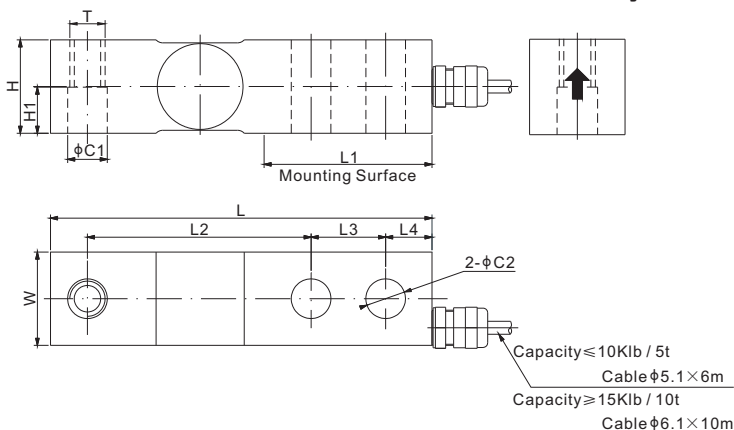

DIMENSIONS

RATED CAPACITY	C1	C2	H	H1	L	L1	L2	L3	L4	W	T
lb/inches											
250-4,000; SE5,000	0.53	0.53	1.25	0.62	5.12	2.25	3.00	1.00	0.62	1.25	1/2-20 UNF-2B
5,000-10,000	0.78	0.78	1.50	0.75	6.75	3.00	3.75	1.50	0.75	1.50	3/4-16 UNF-2B
15,000-20,000	1.03	1.03	2.00	1.00	8.88	4.00	4.88	2.00	1.00	2.00	1-14 UNS-2B

SPECIFICATIONS

Full Scale Output	3.0 mV/V $\pm 0.25\%$	Element Material	Alloy Steel, Nickel Plated
Zero Balance	± 0.02 mV/V	Recommended Excitation	10V (15V Maximum)
Non-linearity	Cap. $\leq 750\text{lb}$: $\pm 0.03\%$; Cap. $> 750\text{lb}$: $\pm 0.02\%$	Insulation Resistance	$> 2 [50\text{V DC}] \text{ G}\Omega$
Repeatability	$\pm 0.02\%$	Compensated Temperature Range	-10°C to 50°C / 14°F to 122°F
Hysteresis Error	Cap. $\leq 750\text{lb}$: $\pm 0.03\%$; Cap. $> 750\text{lb}$: $\pm 0.02\%$	Safe Overload	150% of full scale
Creep in 30 min.	$\pm 0.025\%$	Breaking Overload	300% of full scale
Input Resistance	350 $\Omega \pm 7$	Seal Type / IP Rating	Environmentally Sealed / IP67
Output Resistance	350 $\Omega \pm 3$	Cable Color Code	Exc+ Red Exc- Black Sig+ Green Sig- White Shield Bare

PART NUMBER*

Rated Capacity	Part No.	Weight (kg) Approx.
250lb.....	563YH-23A-250lb.....	1.0
500lb.....	563YH-23A-500lb.....	1.0
750lb.....	563YH-23-750lb.....	1.0
1Klb.....	563YH-23-1Klb.....	1.0
1.5Klb.....	563YH-23-1.5Klb.....	1.0
2Klb.....	563YH-23-2Klb.....	1.0
2.5Klb.....	563YH-23-2.5Klb.....	1.0
4Klb.....	563YH-23-4Klb.....	1.0
SE5Klb.....	563YH-23-SE5Klb.....	1.0
5Klb.....	563YH-23-5Klb.....	1.8
10Klb.....	563YH-23-10Klb.....	1.8
15Klb.....	563YH-23-15Klb.....	4.0
20Klb.....	563YH-23-20Klb.....	4.0

SE refers to small envelope

* ATEX, FM, IECEx approved versions carry the "-Ex" suffix.

250lb-2.5Klb: NTEP 1:5 000 Class III, Single Cell;
NTEP 1:9 500 Class III, Multiple Cell
4Klb-20Klb: NTEP 1:6 000 Class III, Single Cell;
NTEP 1:10 000 Class III, Multiple Cell

1Klb-5Klb: OIML MAA C4, Y=15 000;
10Klb-20Klb: OIML MAA C6, Y=8 500

For further available P/N's & specifications per NTEP/OIML classes, please contact us.

www.anyload.com

© 2023 ANYLOAD V2 dimensions and specifications subject to change without notice

INTERCHANGEABLE REFERENCE

Brand	Model
Coti Global.....	CG-23
Rice Lake.....	RL30000
Rice Lake.....	RL35023
Vishay Celtron.....	SQB
Vishay Revere Transducers.....	5123
Vishay Sensortronics.....	65023A
Vishay Tedea-Huntleigh.....	3411