



Features:


- Assembles: 101NH S-beam load cell
- Capacities: 500lb-10Klb
- Reduces “friction” found within Rod End Bearings w/Clevises
- Enables high accuracy tension loading & repeatability

Also available for our stainless steel load cells 101NSGS and 101BS S-Beam load cells up to 10Klb

Load Cell Certifications:



Load Cell Not Included.

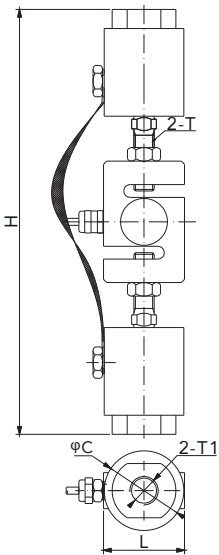

DIMENSIONS

LOAD CELL CAPACITY	H _{Min/Max}	C	L	T	T1
Klb/inches					
0.5- 3	10.16/ 10.87	1.97	2.00	1/ 2- 20 UNF	3/ 4- 10 UNC- 2B
5- 10	13.15/ 13.78	2.48	3.00	3/ 4- 16 UNF	1- 8 UNC- 2B
kg/mm (conversion of above dimensions)					
226- 1,360	258.0/ 276.0	50.0	50.8	1/ 2- 20 UNF	3/ 4- 10 UNC- 2B
2,267- 4,535	334.0/ 350.0	63.0	76.2	3/ 4- 16 UNF	1- 8 UNC- 2B

PART NUMBER		
Load Cell Capacity	Part No.	Weight Approx.(kg)
500lb-3Klb	101NHM3-(0.5-3)Klb.....	2.0
5Klb-10Klb.....	101NHM3-(5-10)Klb.....	3.9

WEIGH MODULES