




Features:

- High & low temperature accuracy and high stability
- Can be connected directly to 1or 2 load cells or connected up to 8 x350Ω load cells through a junction box
- Support multiple magnification range, two types of excitation voltage available
- Anti-EFT (Electrical Fast Transient pulses) interference & anti-radiation interference

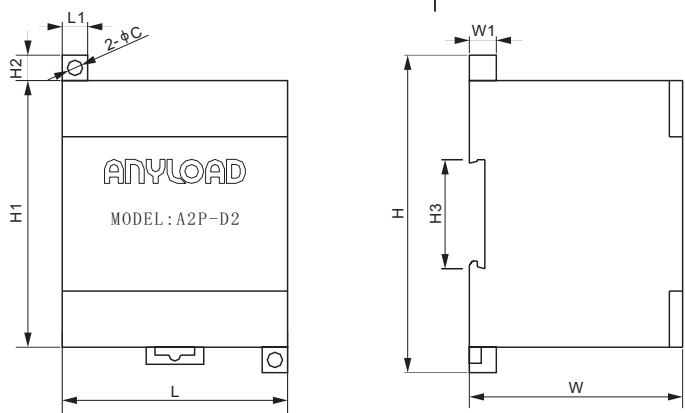

DIMENSIONS

	C	H	H1	H2	H3	L	L1	W	W1
mm	4.8	100	84	8	35	71	8	67.2	8.5
inches	0.2	3.9	3.3	0.3	1.4	2.8	0.3	2.6	0.3

SPECIFICATIONS

Load Cell Type		All strain gage type	Linearity		≤ 0.02%
Power Supply	V DC	24	Max. Input Offset Voltage	μV	50
Input Range	mV	0 ± 36	Min. Common-mode	dB	100
Max. Power	W	4.35	Rejection Ratio (G=10)		
Output Signal	V	0 ± 10	Installation		Standard rail channel (Indoor)
	mA	4-20	Enclosure Material		PVC casting
Voltage Full Scale	ppm/°C	50	Excitation voltage to load cell	V	5 or 12
Temperature Drift			Tare Limit		Shall not exceed 30% of full load
Current Full Scale	ppm/°C	80	Operating temperature range	°C / °F	-10 - 50 / 14 - 122
Temperature Drift					

PART NUMBER

Part No.	*Compatibility with Balluff's IO-LINK Modules	Weight Approx. (kg)
A2P-D2.....	No.....	0.2
A2P-D2B.....	Yes	0.2


* compatible models of IO-Link of Balluff's:

- BNI IOL-709-000-K006
- BNI IOL-710-000-K006
- BNI IOL-712-000-K023
- BNI IOL-714-000-K023

Set up note:

A2P-D2B → Analogue to IO-LINK module → IO-LINK device

CONNECTION DIAGRAM

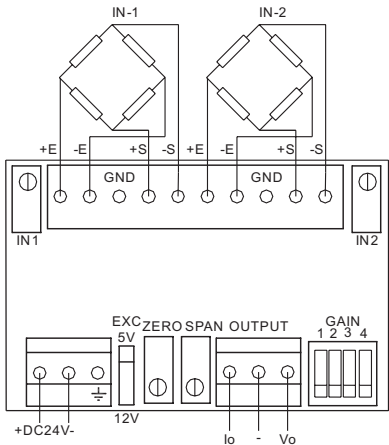

Product Datasheet Disclaimer

Information Changes:

All product specifications, statements, information, and data (collectively, the "Information") in this catalog or made available elsewhere by ANYLOAD are subject to change. Customers must verify the applicability of the Information at the time of order placement.

Accuracy and Reliability:

While all Information is believed to be accurate and reliable, it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Laboratory Conditions:

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all metrological conditions. Users must validate that a product with the described properties is suitable for their applications.

Interchangeability:

Statements of interchangeability with other manufacturers are based on ANYLOAD's knowledge at the time of publication and are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another Manufacturer.

Warranty Voidance:

Any use of the product outside of specifications or any storage or installation inconsistent with product guidance voids any warranty.

Intended Use:

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. ANYLOAD provides technical advice without obligation or liability for the advice given or results obtained.

Component Failures:

Although ANYLOAD designs and manufactures its products to stringent quality and safety standards, isolated component failures may still occur. Applications requiring high reliability or safety should employ suitable designs or safeguards to ensure that component failure does not result in personal injury or property damage.

High-Risk Applications:

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services, or deliverables for use in high-risk applications (e.g., medical life support, nuclear facilities, weapon systems). ANYLOAD makes no assurances that the products are suitable for high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process.

Contact authorized ANYLOAD personnel for special terms and conditions regarding products designed for specific safety requirements.

Safety Measures:

All product-related warnings, cautions, and notes must be observed. Customers should not assume that all safety measures are indicated or that other measures may not be required.

California Proposition 65:

 **WARNING:** Some products manufactured or distributed by ANYLOAD may contain trace amounts of chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm. These substances are present in minimal quantities and are typically encapsulated within our products. This warning is provided to enable you to make informed decisions as a consumer.